









**01** ARCHITECTURAL SITE PLAN  
SCALE: 1/32" = 1'-0"

**KEYNOTES**

1. ENTRY PORTAL, REFER TO SHEET A-100. SLOPE GRADE TO DRAIN.
2. ENTRY BLOCK "A", REFER TO SHEET A-102. SLOPE GRADE TO DRAIN.
3. ENTRY BLOCK "B", REFER TO SHEET A-102. SLOPE GRADE TO DRAIN.
4. EXISTING ENTRY PORTAL TO BE DEMOLISHED, INCLUDING FOOTING.
5. EXISTING ENTRY SIGN TO BE DEMOLISHED, INCLUDING FOOTING.
6. EXISTING TRANSFORMER TO REMAIN.
7. EXISTING ELECTRIC LINE TO REMAIN.
8. EXISTING FORCE-MAIN SEWER TO REMAIN.
9. EXISTING TELEPHONE LINE TO REMAIN.
10. EXISTING WATER LINE TO REMAIN.
11. EXISTING, ABANDONED WATER LINE, IF FOOTING OF PORTAL BLOCK IS IN CONFLICT, CUT AND CAP CLOSER TO ROAD TO ALLOW FOR FOOTING.
12. EXISTING ROADWAY TO REMAIN.
13. EXISTING POLE LIGHTS TO REMAIN.
14. EXISTING ENTRY SIGN LIGHT TO BE REMOVED, PLACE COVER PLATE OVER JUNCTION.
15. ELECTRIC LINE FOR PROPOSED PORTAL LIGHTING. DIRECTIONALLY BORE LINE UNDER ROADWAY, DIRECT-BURY LINE EVERYWHERE ELSE.
16. PORTAL LIGHT, STONCO - LYTEPRO FLOODLIGHT (LPF3 - FLOOD W/ PHOTO CONTROL).
17. CENTERLINE OF EXISTING ROADWAY.
18. EXISTING ELECTRIC HAND-HOLE, RUN NEW ELECTRIC FROM THIS JUNCTION.

**GENERAL NOTES**

- A. FIELD VERIFY ALL DIMENSIONS PRIOR TO CONSTRUCTION.
- B. ALL ELECTRICAL WORK TO BE NEC 2010 AND LOCAL CODE COMPLIANT.
- C. STOCKPILE EXTRA DIRT WITHIN RESORT IN LOCATION DETERMINED BY DNR INSPECTOR.

**REFERENCE SITE PLAN**

ENTRANCE PORTALS FOR  
**HONEY CREEK RESORT SP**

12669 RESORT DRIVE APPANOOSE COUNTY, IOWA

**IOWA DEPARTMENT OF  
NATURAL RESOURCES**

ENGINEERING SERVICES - WALLACE BUILDING  
502 E. 9TH ST., DES MOINES, IA 50319-0034  
P: 515.725.8200  
F: 515.725.8202



CONSULTANT:

NO.	BY	DATE	REVISION


DRAWN BY: PROJECT NUMBER:  
15-05-63-04

CHK'D BY: DATE:  
04.29.2015

SHEET No:

**A-010**

**01** ARCHITECTURAL SITE PLAN  
SCALE: 1/32" = 1'-0"

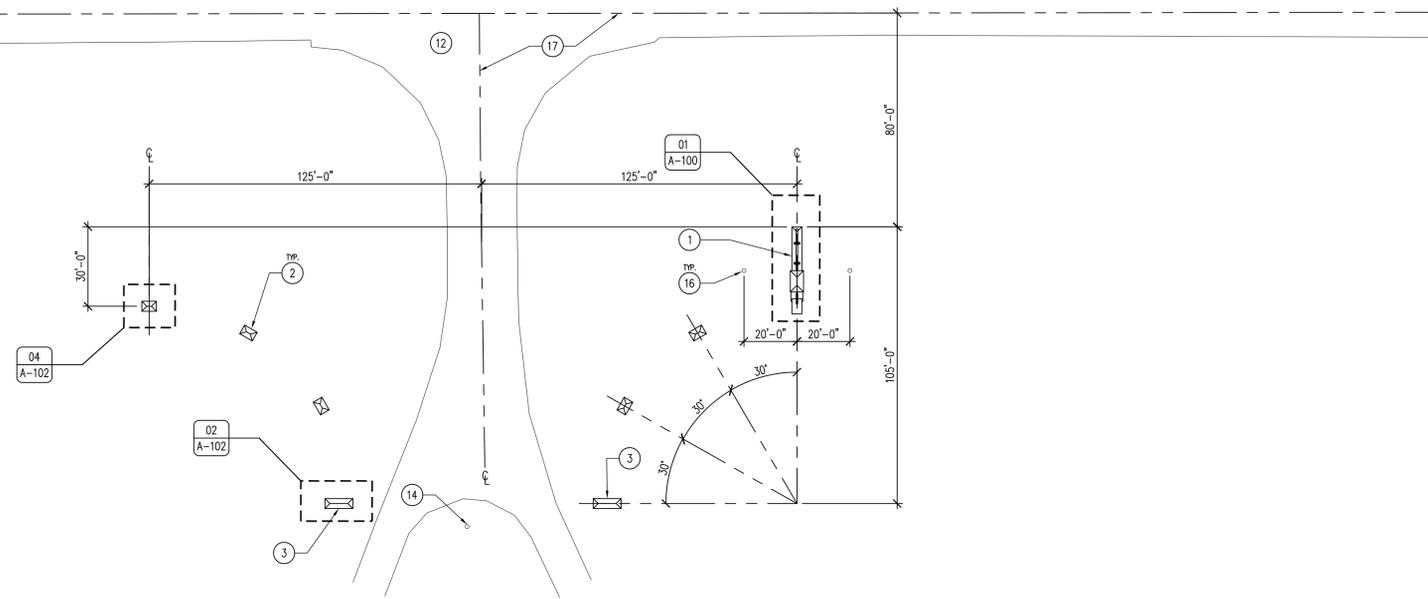


**KEYNOTES**

1. ENTRY PORTAL, REFER TO SHEET A-100. SLOPE GRADE TO DRAIN.
2. ENTRY BLOCK "A", REFER TO SHEET A-102. SLOPE GRADE TO DRAIN.
3. ENTRY BLOCK "B", REFER TO SHEET A-102. SLOPE GRADE TO DRAIN.
4. EXISTING ENTRY PORTAL TO BE DEMOLISHED, INCLUDING FOOTING.
5. EXISTING ENTRY SIGN TO BE DEMOLISHED, INCLUDING FOOTING.
6. EXISTING TRANSFORMER TO REMAIN.
7. EXISTING ELECTRIC LINE TO REMAIN.
8. EXISTING FORCE-MAIN SEWER TO REMAIN.
9. EXISTING TELEPHONE LINE TO REMAIN.
10. EXISTING WATER LINE TO REMAIN.
11. EXISTING, ABANDONED WATER LINE, IF FOOTING OF PORTAL BLOCK IS IN CONFLICT, CUT AND CAP CLOSER TO ROAD TO ALLOW FOR FOOTING.
12. EXISTING ROADWAY TO REMAIN.
13. EXISTING POLE LIGHTS TO REMAIN.
14. EXISTING ENTRY SIGN LIGHT TO BE REMOVED, PLACE COVER PLATE OVER JUNCTION.
15. ELECTRIC LINE FOR PROPOSED PORTAL LIGHTING. DIRECTIONALLY BORE LINE UNDER ROADWAY, DIRECT-BURY LINE EVERYWHERE ELSE.
16. PORTAL LIGHT, STONCO - LYTEPRO FLOODLIGHT (LPF3 - FLOOD W/ PHOTO CONTROL).
17. CENTERLINE OF EXISTING ROADWAY.
18. EXISTING ELECTRIC HAND-HOLE, RUN NEW ELECTRIC FROM THIS JUNCTION.

**GENERAL NOTES**

- A. FIELD VERIFY ALL DIMENSIONS PRIOR TO CONSTRUCTION.
- B. ALL ELECTRICAL WORK TO BE NEC 2010 AND LOCAL CODE COMPLIANT.
- C. STOCKPILE EXTRA DIRT WITHIN RESORT IN LOCATION DETERMINED BY DNR INSPECTOR.

CONSULTANT:



**IOWA DEPARTMENT OF  
NATURAL RESOURCES**  
ENGINEERING SERVICES - WALLACE BUILDING  
502 E. 9TH ST., DES MOINES, IA 50319-0034  
P: 515.725.8200  
F: 515.725.8202



ARCHITECTURAL SITE PLAN

ENTRANCE PORTALS FOR  
**HONEY CREEK RESORT SP**


12669 RESORT DRIVE  
APPANOOSE COUNTY, IOWA

NO.	BY	DATE	REVISION


DRAWN BY: PROJECT NUMBER:  
15-05-63-04

CHK'D BY: DATE:  
04.29.2015


SHEET No:  
**A-011**

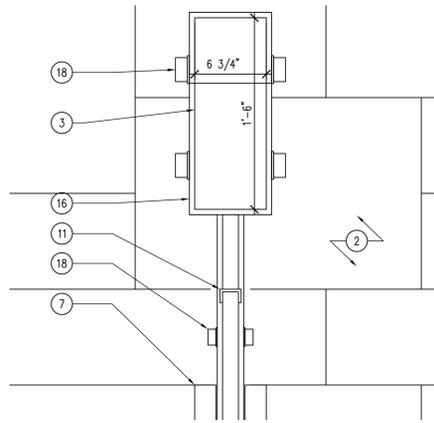

06 DETAIL - BEAM AND BRACKET  
SCALE: 1 1/2" = 1'-0"

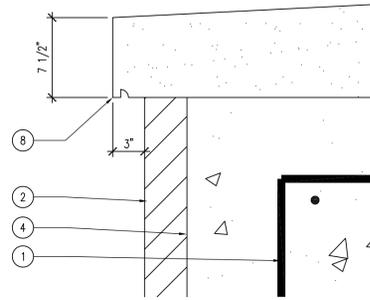


05 DETAIL - CAPSTONE EDGE  
SCALE: 1 1/2" = 1'-0"

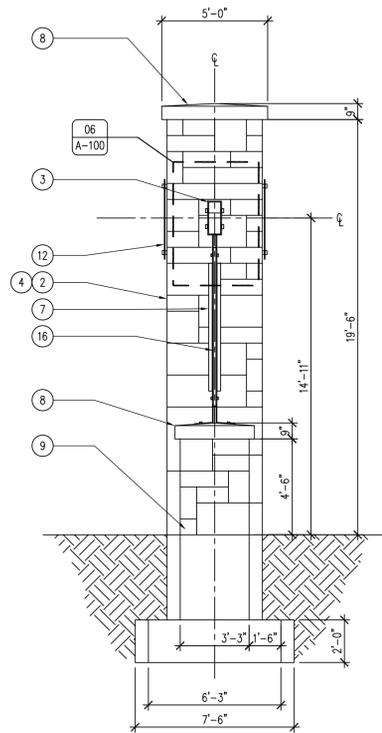


03 ELEVATION - ENTRANCE PORTAL  
SCALE: 1/4" = 1'-0"

04 NOT USED  
SCALE: 1/4" = 1'-0"

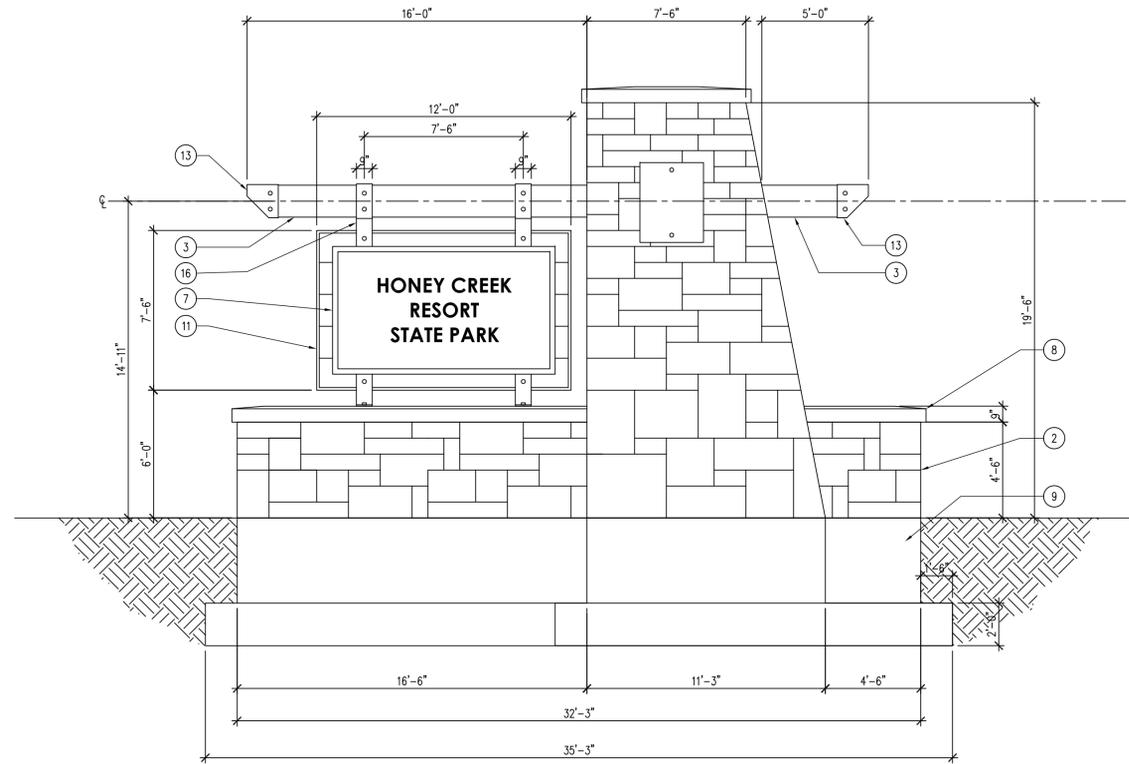

02 ELEVATION - ENTRANCE PORTAL  
SCALE: 1/4" = 1'-0"

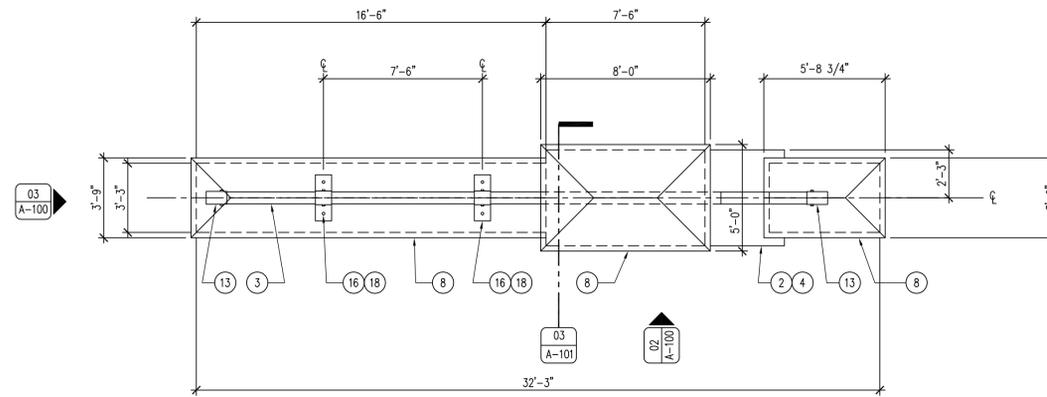

01 REFERENCE PLAN - ENTRANCE PORTAL  
SCALE: 1/4" = 1'-0"

KEYNOTES

1. #4 REBAR 24" O.C. ALL DIRECTIONS.
2. 4" THICK, SOLID ROUGH-CUT LIMESTONE BRICK WITH UNCOURSED LEDGE ROCK PATTERN AND BATTERING EFFECT AS SHOWN WITH LIME MORTAR AS SPECIFIED. DIMENSIONS AND SHAPE SHOULD VARY BETWEEN 6" TO 18". ALL STONE TO BE LOCALLY SOURCED, QUARRIED WITHIN 50 MILES OF PROJECT LOCATION. PATTERNING SHOWN FOR DEMONSTRATION PURPOSES ONLY, REFER TO PATTERN SWATCH FOR MORE INFORMATION. 1/2" AIR SPACE WITH CORROSION RESISTANT ANCHORS AND FASTENERS AS REQUIRED. LOCATE WEEP HOLES WHERE REQUIRED. SUBMIT SAMPLES FOR APPROVAL.
3. 6 3/4" EXTERIOR GRADE GLULAM BEAM WITH 2 COATS OF TWP 100 SERIES STAIN FINISH, COLOR TBD. MATCH BEAM DEPTH DIMENSION AS SHOWN.
4. CAST IN PLACE CONCRETE WALL BACKER MONUMENT.
5. NOT USED.
6. 1/2" STAINLESS STEEL BEAM RECEIVER SLEEVE, CAST INTO CONCRETE MONUMENT.
7. 2" SIGN-FOAM STATE PARK SIGN, SUPPLIED BY OWNER, CONTRACTOR INSTALLED WITH 1/2" STAINLESS STEEL FASTENERS.
8. MONOLITHIC SELECT GRADE, BUFF INDIANA LIMESTONE CAP WITH CONTINUOUS COPPER PERIMETER DRIP EDGE AS SHOWN, MATCH DIMENSIONS AS SHOWN. SUBMIT SHOP DRAWINGS.
9. CAST IN PLACE CONCRETE FOUNDATION.
10. COPPER FLASHING WHERE NECESSARY.
11. 2X T&G CEDAR DECKING, STAIN TO MATCH GLULAM BEAM, TWO COATS TWP 100 SERIES. TRIM OUT WITH 1/4" STEEL FRAMING AROUND ENTIRE PERIMETER OF WOOD, EPOXY PAINT BLACK, DRILL WEEP HOLES IN BOTTOM OF FRAME.
12. FUTURE SIGN, DEMONSTRATION ONLY.
13. 3/8" STEEL BEAM COVER AS SHOWN, EPOXY PAINT BLACK.
14. NOT USED.
15. NOT USED.
16. 3/8" CORROSION RESISTANT STEEL STRAP, EPOXY PAINT BLACK.
17. CONTINUOUS BACKER MATERIAL AND POLYURETHANE SEALANT TO MATCH MORTAR.
18. 3/4" STAINLESS STEEL ATTACHMENT BOLTS AND LOCK WASHERS.

GENERAL NOTES

- A. FIELD VERIFY ALL DIMENSIONS PRIOR TO CONSTRUCTION.
- B. USE COPPER FLASHING AND WEEP ROPES AT ALL NECESSARY LOCATIONS.
- C. USE CORROSION RESISTANT ACCESSORIES ON ALL TIE-BACK AND ANCHOR LOCATIONS.
- D. USE TYPE "N" LIME MORTAR (ASTM C270) ON ALL MASONRY MORTAR JOINTS.
- E. ALL WOOD PRODUCTS TO RECEIVED TWO COATS OF TWP 100 SERIES STAIN.
- F. SUBMIT SHOP DRAWINGS ON STONE LAYOUT, REBAR LAYOUT, LIMESTONE CAPS, LAMINATED WOOD BEAM, STEEL STRAPPING AND ACCESSORIES AND SIGN BACKER DESIGN.

CONSULTANT:

IOWA DEPARTMENT OF  
NATURAL RESOURCES

ENGINEERING SERVICES - WALLACE BUILDING  
502 E. 9TH ST., DES MOINES, IA 50319-0034  
P: 515.725.8200  
F: 515.725.8202



ENTRY PORTAL PLAN & ELEVATIONS

ENTRANCE PORTALS FOR  
HONEY CREEK RESORT SP

APPANOOSE COUNTY, IOWA

12669 RESORT DRIVE

NO. BY DATE REVISION


DRAWN BY: PROJECT NUMBER:


15-05-63-04

CHK'D BY: DATE:


04.29.2015

SHEET No:


A-100

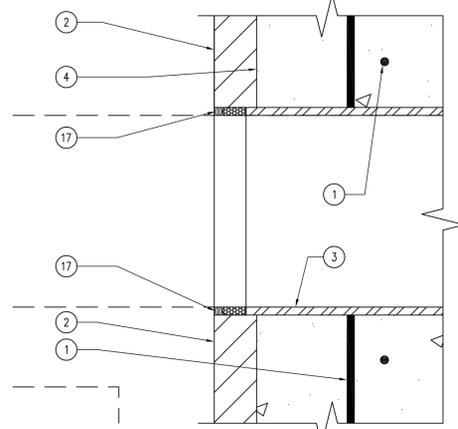


06 ENTRANCE PORTAL - DETAIL  
SCALE: 1 1/2" = 1'-0"

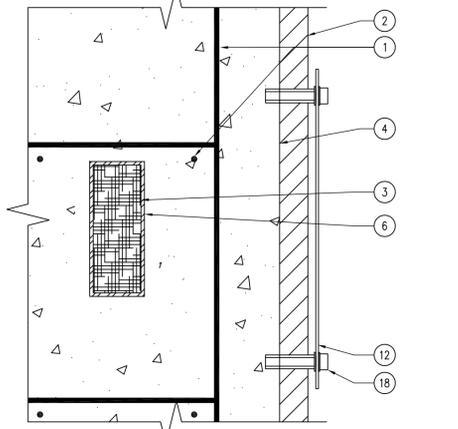


05 ENTRANCE PORTAL - DETAIL  
SCALE: 1" = 1'-0"

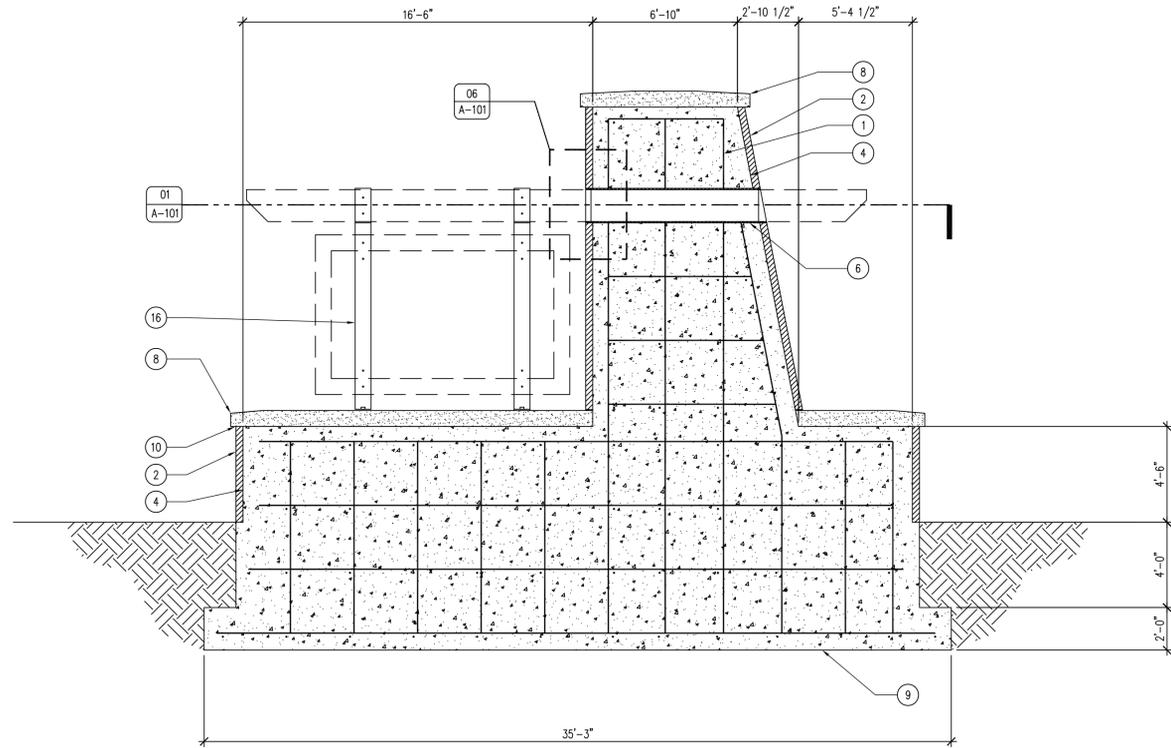

02 SECTION - ENTRANCE PORTAL  
SCALE: 1/4" = 1'-0"

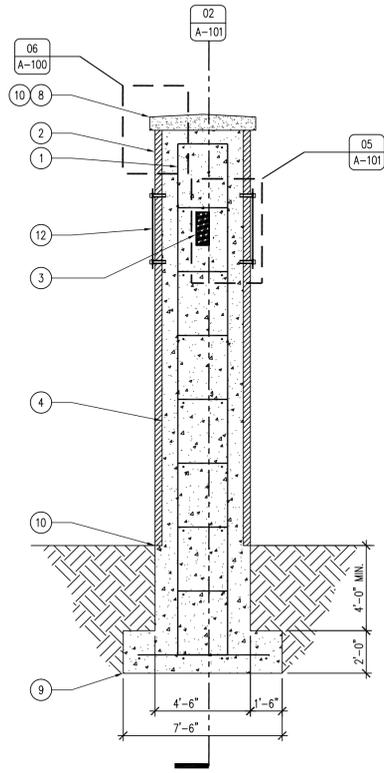

03 SECTION - ENTRANCE PORTAL  
SCALE: 1/4" = 1'-0"

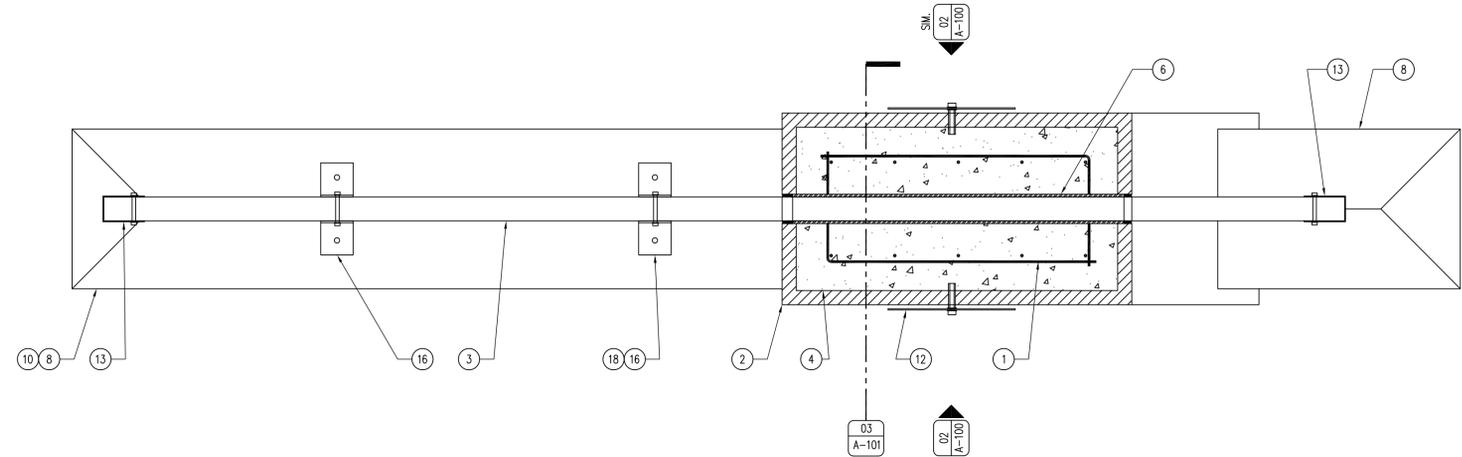

01 SECTION - ENTRANCE PORTAL  
SCALE: 1/2" = 1'-0"

04 NOT USED  
SCALE:

KEYNOTES

1. #4 REBAR 24" O.C. ALL DIRECTIONS.
2. 4" THICK, SOLID ROUGH-CUT LIMESTONE BRICK WITH UNCOURSED LEDGE ROCK PATTERN AND BATTERING EFFECT AS SHOWN WITH LIME MORTAR AS SPECIFIED. DIMENSIONS AND SHAPE SHOULD VARY BETWEEN 6" TO 18". ALL STONE TO BE LOCALLY SOURCED, QUARRIED WITHIN 50 MILES OF PROJECT LOCATION. PATTERNING SHOWN FOR DEMONSTRATION PURPOSES ONLY, REFER TO PATTERN SWATCH FOR MORE INFORMATION. 1/2" AIR SPACE WITH CORROSION RESISTANT ANCHORS AND FASTENERS AS REQUIRED. LOCATE WEEP HOLES WHERE REQUIRED. SUBMIT SAMPLES FOR APPROVAL.
3. 18" X 6 3/4" EXTERIOR GRADE GLULAM BEAM WITH 2 COATS OF TWP 100 SERIES STAIN FINISH, COLOR TBO.
4. CAST IN PLACE CONCRETE WALL BACKER MONUMENT.
5. NOT USED.
6. 1/2" STAINLESS STEEL BEAM RECEIVER SLEEVE, CAST INTO CONCRETE MONUMENT.
7. 2" SIGN-FOAM STATE PARK SIGN, SUPPLIED BY OWNER, CONTRACTOR INSTALLED WITH 1/2" STAINLESS STEEL FASTENERS.
8. 9" MONOLITHIC SELECT GRADE, BUFF INDIANA LIMESTONE CAP WITH CONTINUOUS COPPER PERIMETER DRIP EDGE AS SHOWN. SUBMIT SHOP DRAWINGS.
9. CAST IN PLACE CONCRETE FOUNDATION.
10. COPPER FLASHING WHERE NECESSARY.
11. 2X T&G CEDAR DECKING, STAIN TO MATCH GLULAM BEAM, TWO COATS TWP 100 SERIES. TRIM OUT WITH 1/4" STEEL FRAMING AROUND ENTIRE PERIMETER OF WOOD, EPOXY PAINT BLACK, DRILL WEEP HOLES IN BOTTOM OF FRAME.
12. FUTURE SIGN, DEMONSTRATION ONLY.
13. 3/8" STEEL BEAM COVER AS SHOWN, EPOXY PAINT BLACK.
14. NOT USED.
15. NOT USED.
16. 3/8" CORROSION RESISTANT STEEL STRAP, EPOXY PAINT BLACK.
17. CONTINUOUS BACKER MATERIAL AND POLYURETHANE SEALANT TO MATCH MORTAR.
18. 3/4" STAINLESS STEEL ATTACHMENT BOLTS AND LOCK WASHERS.

GENERAL NOTES

- A. FIELD VERIFY ALL DIMENSIONS PRIOR TO CONSTRUCTION.
- B. USE COPPER FLASHING AND WEEP ROPES AT ALL NECESSARY LOCATIONS.
- C. USE CORROSION RESISTANT ACCESSORIES ON ALL TIE-BACK AND ANCHOR LOCATIONS.
- D. USE TYPE "O" LIME MORTAR (ASTM C270-07 COMPLIANT) ON ALL MASONRY MORTAR JOINTS.
- E. ALL WOOD PRODUCTS TO RECEIVED TWO COATS OF TWP 100 SERIES STAIN.
- F. SUBMIT SHOP DRAWINGS ON STONE LAYOUT, REBAR LAYOUT, LIMESTONE CAPS, LAMINATED WOOD BEAM, STEEL STRAPPING AND ACCESSORIES AND SIGN BACKER DESIGN.

CONSULTANT:

IOWA DEPARTMENT OF  
NATURAL RESOURCES

ENGINEERING SERVICES - WALLACE BUILDING  
502 E. 9TH ST., DES MOINES, IA 50319-0034  
P: 515.725.8200  
F: 515.725.8202



ENTRY PORTAL SECTIONS & DETAILS

ENTRANCE PORTALS FOR  
HONEY CREEK RESORT SP

APPANOOSE COUNTY, IOWA

12663 RESORT DRIVE

NO. BY DATE REVISION


DRAWN BY: PROJECT NUMBER:


15-05-63-04

CHK'D BY: DATE:


04.29.2015

SHEET NO:


A-101

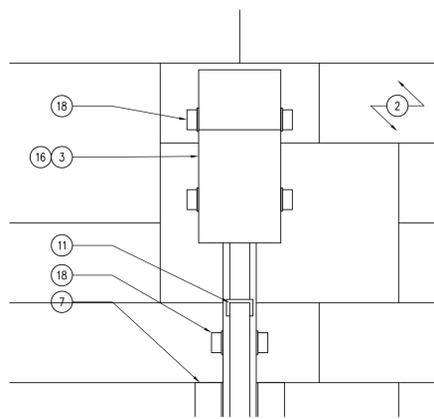


06 DETAIL - BEAM AND BRACKET  
SCALE: 1 1/2" = 1'-0"

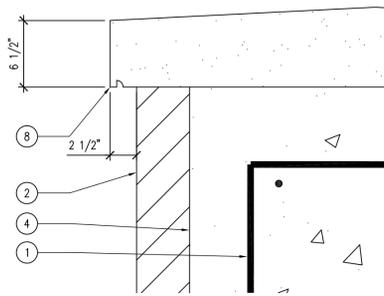


05 DETAIL - CAPSTONE EDGE  
SCALE: 1 1/2" = 1'-0"

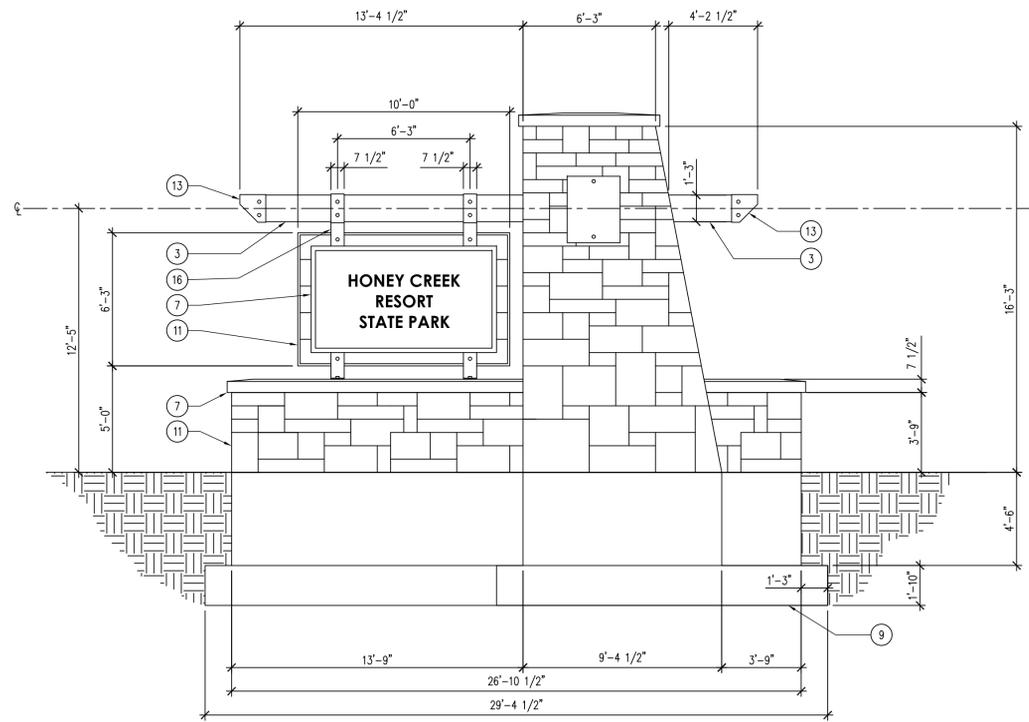

02 ELEVATION - ENTRANCE PORTAL  
SCALE: 1/4" = 1'-0"

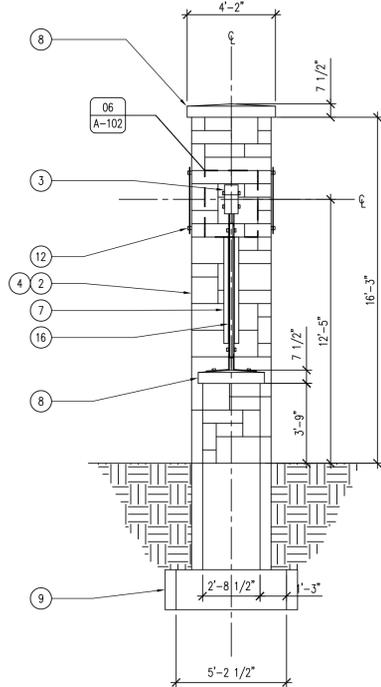

03 ELEVATION - ENTRANCE PORTAL  
SCALE: 1/4" = 1'-0"

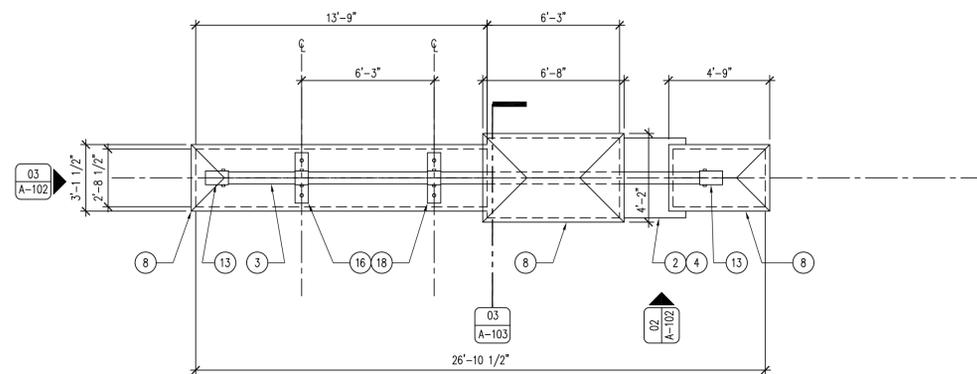

01 REFERENCE PLAN - ENTRANCE PORTAL  
SCALE: 1/4" = 1'-0"

04 NOT USED  
SCALE: 1/4" = 1'-0"

# ALTERNATE # 1

## KEYNOTES

1. #4 REBAR 24" O.C. ALL DIRECTIONS.
2. 4" THICK, SOLID ROUGH-CUT LIMESTONE BRICK WITH UNCOURSED LEDGE ROCK PATTERN AND BATTERING EFFECT AS SHOWN WITH LIME MORTAR AS SPECIFIED. DIMENSIONS AND SHAPE SHOULD VARY BETWEEN 6" TO 18". ALL STONE TO BE LOCALLY SOURCED, QUARRIED WITHIN 50 MILES OF PROJECT LOCATION. PATTERNING SHOWN FOR DEMONSTRATION PURPOSES ONLY, REFER TO PATTERN SWATCH FOR MORE INFORMATION. 1/2" AIR SPACE WITH CORROSION RESISTANT ANCHORS AND FASTENERS AS REQUIRED. LOCATE WEEP HOLES WHERE REQUIRED. SUBMIT SAMPLES FOR APPROVAL.
3. 6 3/4" EXTERIOR GRADE GLULAM BEAM WITH 2 COATS OF TWP 100 SERIES STAIN FINISH, COLOR TBD. MATCH BEAM DEPTH DIMENSION AS SHOWN.
4. CAST IN PLACE CONCRETE WALL BACKER MONUMENT.
5. NOT USED.
6. 1/2" STAINLESS STEEL BEAM RECEIVER SLEEVE, CAST INTO CONCRETE MONUMENT.
7. 2" SIGN-FOAM STATE PARK SIGN, SUPPLIED BY OWNER, CONTRACTOR INSTALLED WITH 1/2" STAINLESS STEEL FASTENERS.
8. MONOLITHIC SELECT GRADE, BUFF INDIANA LIMESTONE CAP WITH CONTINUOUS COPPER PERIMETER DRIP EDGE AS SHOWN. MATCH DIMENSIONS AS SHOWN. SUBMIT SHOP DRAWINGS.
9. CAST IN PLACE CONCRETE FOUNDATION.
10. COPPER FLASHING WHERE NECESSARY.
11. 2X T&G CEDAR DECKING, STAIN TO MATCH GLULAM BEAM, TWO COATS TWP 100 SERIES. TRIM OUT WITH 1/4" STEEL FRAMING AROUND ENTIRE PERIMETER OF WOOD, EPOXY PAINT BLACK, DRILL WEEP HOLES IN BOTTOM OF FRAME.
12. FUTURE SIGN, DEMONSTRATION ONLY.
13. 3/8" STEEL BEAM COVER AS SHOWN, EPOXY PAINT BLACK.
14. NOT USED.
15. NOT USED.
16. 3/8" CORROSION RESISTANT STEEL STRAP, EPOXY PAINT BLACK.
17. CONTINUOUS BACKER MATERIAL AND POLYURETHANE SEALANT TO MATCH MORTAR.
18. 3/4" STAINLESS STEEL ATTACHMENT BOLTS AND LOCK WASHERS.

## GENERAL NOTES

- A. FIELD VERIFY ALL DIMENSIONS PRIOR TO CONSTRUCTION.
- B. USE COPPER FLASHING AND WEEP ROPES AT ALL NECESSARY LOCATIONS.
- C. USE CORROSION RESISTANT ACCESSORIES ON ALL TIE-BACK AND ANCHOR LOCATIONS.
- D. USE TYPE "N" LIME MORTAR (ASTM C270) ON ALL MASONRY MORTAR JOINTS.
- E. ALL WOOD PRODUCTS TO RECEIVED TWO COATS OF TWP 100 SERIES STAIN.
- F. SUBMIT SHOP DRAWINGS ON STONE LAYOUT, REBAR LAYOUT, LIMESTONE CAPS, LAMINATED WOOD BEAM, STEEL STRAPPING AND ACCESSORIES AND SIGN BACKER DESIGN.

CONSULTANT:

IOWA DEPARTMENT OF  
NATURAL RESOURCES

ENGINEERING SERVICES - WALLACE BUILDING  
502 E. 9TH ST., DES MOINES, IA 50319-0034  
P: 515.725.8200  
F: 515.725.8202



ENTRY PORTAL PLAN & ELEVATIONS

ENTRANCE PORTALS FOR  
HONEY CREEK RESORT SP

APPANOOSE COUNTY, IOWA

12663 RESORT DRIVE

NO. BY DATE REVISION


DRAWN BY: PROJECT NUMBER:  
15-05-63-04

CHECKED BY: DATE:  
04.29.2015


SHEET No:

A-102




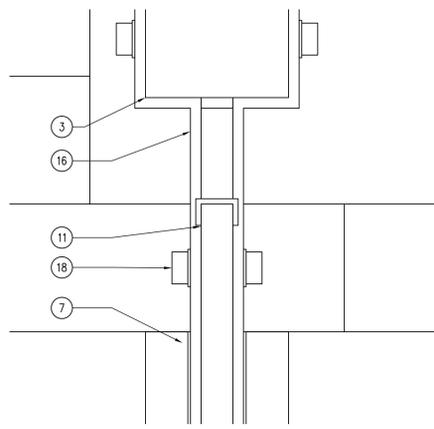


06 ENTRANCE PORTAL - DETAIL  
SCALE: 3" = 1'-0"

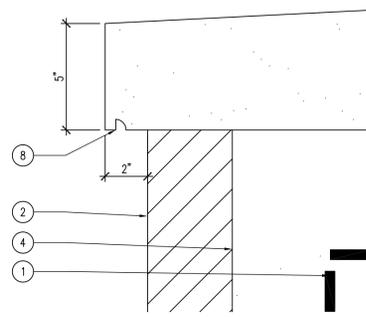


05 ENTRANCE PORTAL - DETAIL  
SCALE: 3" = 1'-0"

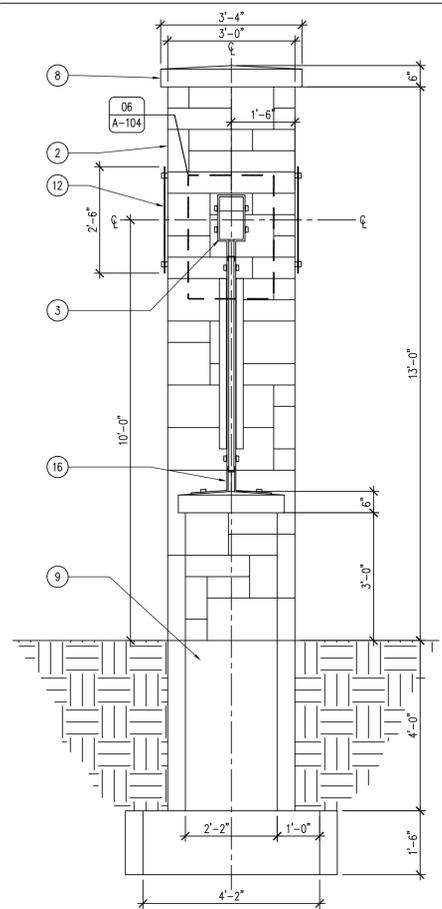

03 ENTRANCE PORTAL - ELEVATION  
SCALE: 1/2" = 1'-0"

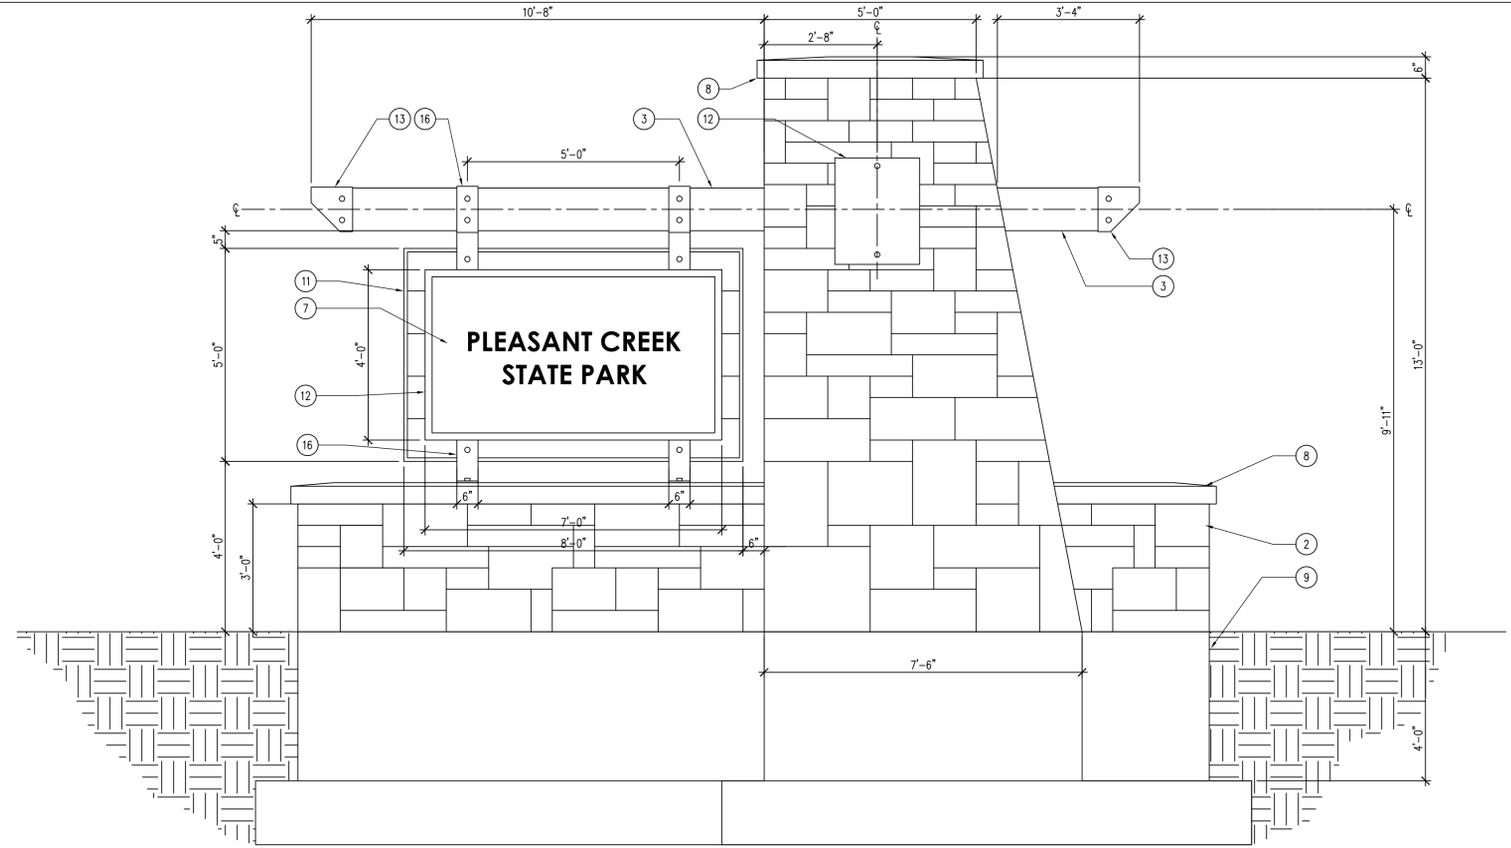

02 ENTRANCE PORTAL - ELEVATION  
SCALE: 1/2" = 1'-0"

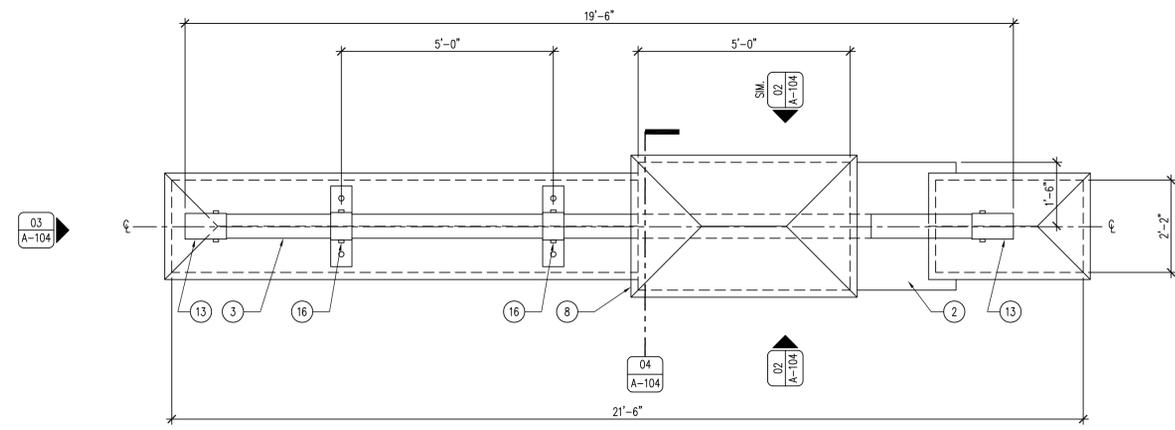

01 ENTRANCE PORTAL - PLAN  
SCALE: 1/2" = 1'-0"

04 NOT USED  
SCALE: 1/2" = 1'-0"

# ALTERNATE #2


## KEYNOTES

- #4 REBAR 24" O.C. ALL DIRECTIONS.
- 4" THICK, SOLID ROUGH-CUT LIMESTONE BRICK WITH UNCOURSED LEDGE ROCK PATTERN AND BATTERING EFFECT AS SHOWN WITH LIME MORTAR AS SPECIFIED. DIMENSIONS AND SHAPE SHOULD VARY BETWEEN 6" TO 18". ALL STONE TO BE LOCALLY SOURCED, QUARRIED WITHIN 50 MILES OF PROJECT LOCATION. PATTERNING SHOWN FOR DEMONSTRATION PURPOSES ONLY, REFER TO PATTERN SWATCH FOR MORE INFORMATION. 1/2" AIR SPACE WITH CORROSION RESISTANT ANCHORS AND FASTENERS AS REQUIRED. LOCATE WEEP HOLES WHERE REQUIRED. SUBMIT SAMPLES FOR APPROVAL.
- 6 3/4" EXTERIOR GRADE GLULAM BEAM WITH 2 COATS OF TWP 100 SERIES STAIN FINISH, COLOR TBD. MATCH BEAM DEPTH DIMENSION AS SHOWN.
- CAST IN PLACE CONCRETE WALL BACKER MONUMENT.
- NOT USED.
- 1/2" STAINLESS STEEL BEAM RECEIVER SLEEVE, CAST INTO CONCRETE MONUMENT.
- 2" SIGN-FOAM STATE PARK SIGN, SUPPLIED BY OWNER, CONTRACTOR INSTALLED WITH 1/2" STAINLESS STEEL FASTENERS.
- MONOLITHIC SELECT GRADE, BUFF INDIANA LIMESTONE CAP WITH CONTINUOUS COPPER PERIMETER DRIP EDGE AS SHOWN, MATCH DIMENSIONS AS SHOWN. SUBMIT SHOP DRAWINGS.
- CAST IN PLACE CONCRETE FOUNDATION.
- COPPER FLASHING WHERE NECESSARY.
- 2X T&G CEDAR DECKING, STAIN TO MATCH GLULAM BEAM, TWO COATS TWP 100 SERIES. TRIM OUT WITH 1/4" STEEL FRAMING AROUND ENTIRE PERIMETER OF WOOD, EPOXY PAINT BLACK, DRILL WEEP HOLES IN BOTTOM OF FRAME.
- FUTURE SIGN, DEMONSTRATION ONLY.
- 3/8" STEEL BEAM COVER AS SHOWN, EPOXY PAINT BLACK.
- NOT USED.
- NOT USED.
- 3/8" CORROSION RESISTANT STEEL STRAP, EPOXY PAINT BLACK.
- 3/8" CORROSION RESISTANT MATERIAL AND POLYURETHANE SEALANT TO MATCH MORTAR.
- 3/4" STAINLESS STEEL ATTACHMENT BOLTS AND LOCK WASHERS.

## GENERAL NOTES

- FIELD VERIFY ALL DIMENSIONS PRIOR TO CONSTRUCTION.
- USE COPPER FLASHING AND WEEP ROPES AT ALL NECESSARY LOCATIONS.
- USE CORROSION RESISTANT ACCESSORIES ON ALL TIE-BACK AND ANCHOR LOCATIONS.
- USE TYPE "N" LIME MORTAR (ASTM C270) ON ALL MASONRY MORTAR JOINTS.
- ALL WOOD PRODUCTS TO RECEIVE TWO COATS OF TWP 100 SERIES STAIN.
- SUBMIT SHOP DRAWINGS ON STONE LAYOUT, REBAR LAYOUT, LIMESTONE CAPS, LAMINATED WOOD BEAM, STEEL STRAPPING AND ACCESSORIES AND SIGN BACKER DESIGN.

CONSULTANT:



**IOWA DEPARTMENT OF NATURAL RESOURCES**  
ENGINEERING SERVICES - WALLACE BUILDING  
502 E. 9TH ST., DES MOINES, IA 50319-0034  
P: 515.725.8200  
F: 515.725.8202



ENTRY PORTAL PLAN & ELEVATIONS


ENTRANCE PORTALS FOR  
**HONEY CREEK RESORT SP**

APPANOOSE COUNTY, IOWA  
12663 RESORT DRIVE


NO.	BY	DATE	REVISION

DRAWN BY: PROJECT NUMBER:  
15-05-63-04  
CHECKED BY: DATE:  
04.29.2015


SHEET No:  
**A-104**

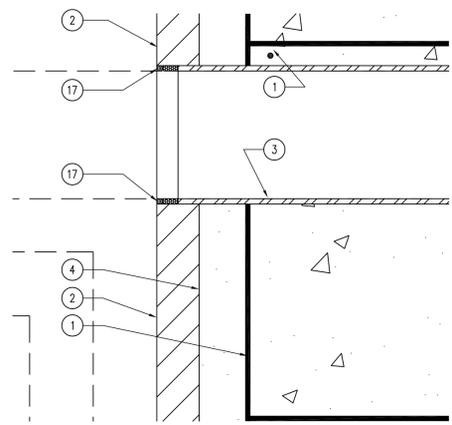


06 ENTRANCE PORTAL - DETAIL  
SCALE: 3" = 1'-0"

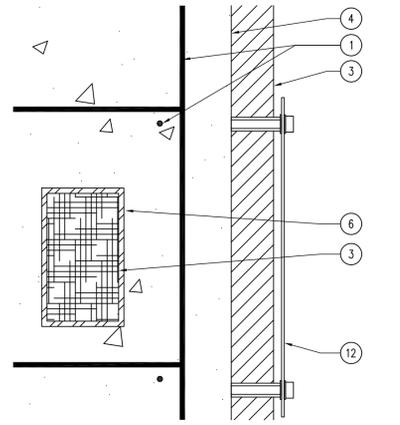


05 ENTRANCE PORTAL - DETAIL  
SCALE: 3" = 1'-0"

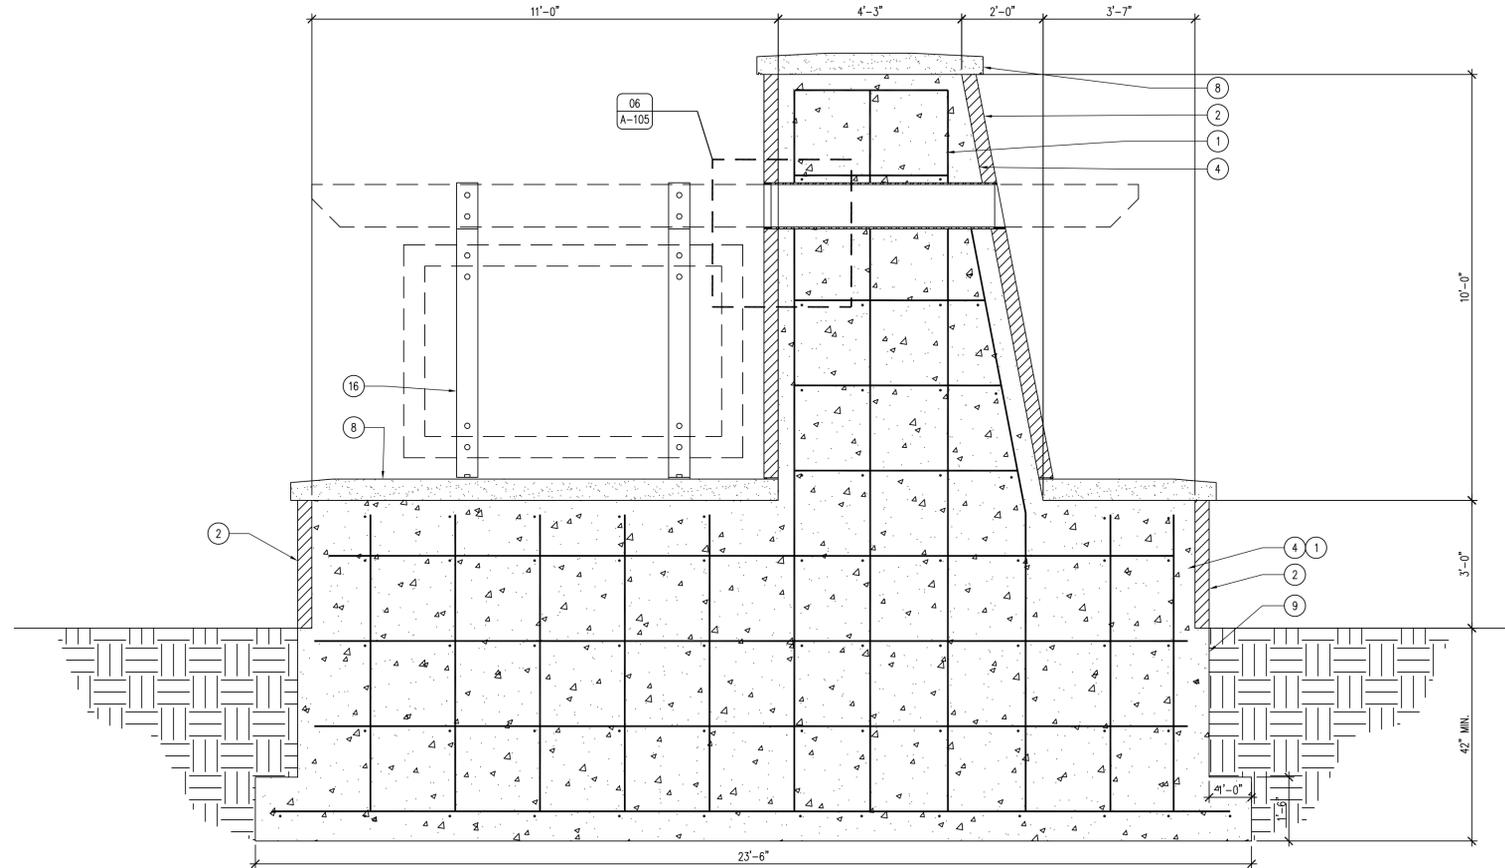

02 ENTRANCE PORTAL - ELEVATION  
SCALE: 1/2" = 1'-0"

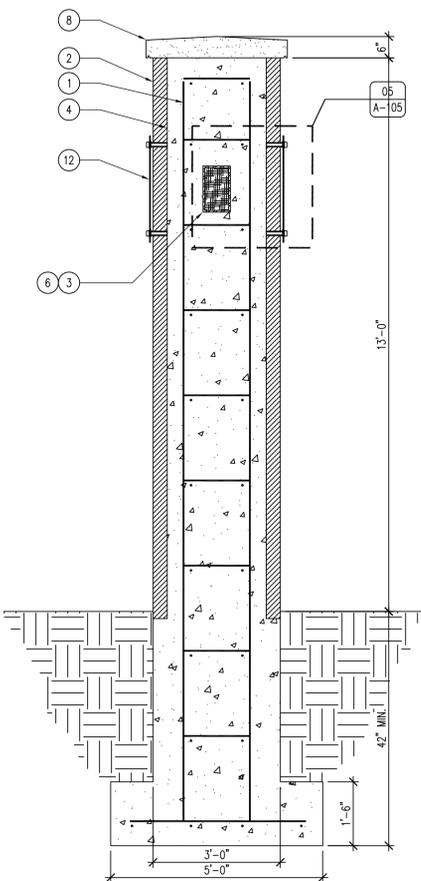

03 ENTRANCE PORTAL - ELEVATION  
SCALE: 1/2" = 1'-0"

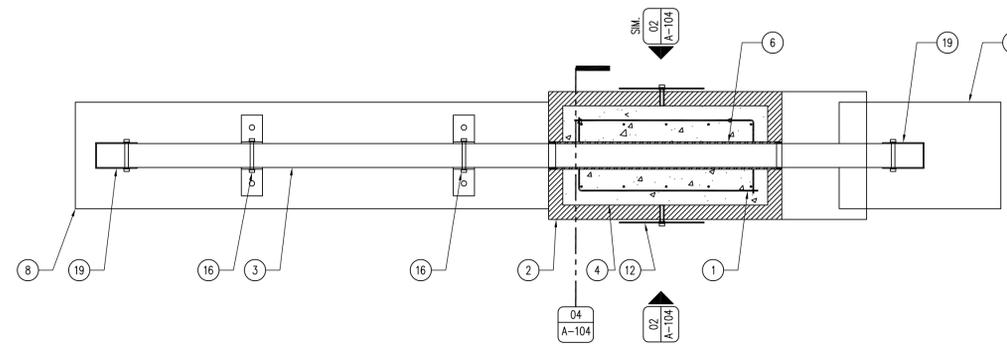

01 ENTRANCE PORTAL - PLAN  
SCALE: 1/2" = 1'-0"

04 NOT USED  
SCALE:

# ALTERNATE #2

### KEYNOTES

1. #4 REBAR 24" O.C. ALL DIRECTIONS.
2. 4" THICK, SOLID ROUGH-CUT LIMESTONE BRICK WITH UNCOURSED LEDGE ROCK PATTERN AND BATTERING EFFECT AS SHOWN WITH LIME MORTAR AS SPECIFIED. DIMENSIONS AND SHAPE SHOULD VARY BETWEEN 6" TO 18". ALL STONE TO BE LOCALLY SOURCED, QUARRIED WITHIN 50 MILES OF PROJECT LOCATION. PATTERNING SHOWN FOR DEMONSTRATION PURPOSES ONLY. REFER TO PATTERN SWATCH FOR MORE INFORMATION. 1/2" AIR SPACE WITH CORROSION RESISTANT ANCHORS AND FASTENERS AS REQUIRED. LOCATE WEEP HOLES WHERE REQUIRED. SUBMIT SAMPLES FOR APPROVAL.
3. 6 3/4" EXTERIOR GRADE GLULAM BEAM WITH 2 COATS OF TWP 100 SERIES STAIN FINISH, COLOR TBD. MATCH BEAM DEPTH DIMENSION AS SHOWN.
4. CAST IN PLACE CONCRETE WALL BACKER MONUMENT.
5. NOT USED.
6. 1/2" STAINLESS STEEL BEAM RECEIVER SLEEVE, CAST INTO CONCRETE MONUMENT.
7. 2" SIGN-FOAM STATE PARK SIGN, SUPPLIED BY OWNER, CONTRACTOR INSTALLED WITH 1/2" STAINLESS STEEL FASTENERS.
8. MONOLITHIC SELECT GRADE, BUFF INDIANA LIMESTONE CAP WITH CONTINUOUS COPPER PERIMETER DRIP EDGE AS SHOWN. MATCH DIMENSIONS AS SHOWN. SUBMIT SHOP DRAWINGS.
9. CAST IN PLACE CONCRETE FOUNDATION.
10. COPPER FLASHING WHERE NECESSARY.
11. 2X T&G CEDAR DECKING, STAIN TO MATCH GLULAM BEAM, TWO COATS TWP 100 SERIES. TRIM OUT WITH 1/4" STEEL FRAMING AROUND ENTIRE PERIMETER OF WOOD, EPOXY PAINT BLACK, DRILL WEEP HOLES IN BOTTOM OF FRAME.
12. FUTURE SIGN, DEMONSTRATION ONLY.
13. 3/8" STEEL BEAM COVER AS SHOWN, EPOXY PAINT BLACK.
14. NOT USED.
15. NOT USED.
16. 3/8" CORROSION RESISTANT STEEL STRAP, EPOXY PAINT BLACK.
17. CONTINUOUS BACKER MATERIAL AND POLYURETHANE SEALANT TO MATCH MORTAR.
18. 3/4" STAINLESS STEEL ATTACHMENT BOLTS AND LOCK WASHERS.

### GENERAL NOTES

- A. FIELD VERIFY ALL DIMENSIONS PRIOR TO CONSTRUCTION.
- B. USE COPPER FLASHING AND WEEP ROPES AT ALL NECESSARY LOCATIONS.
- C. USE CORROSION RESISTANT ACCESSORIES ON ALL TIE-BACK AND ANCHOR LOCATIONS.
- D. USE TYPE "N" LIME MORTAR (ASTM C270) ON ALL MASONRY MORTAR JOINTS.
- E. ALL WOOD PRODUCTS TO RECEIVE TWO COATS OF TWP 100 SERIES STAIN.
- F. SUBMIT SHOP DRAWINGS ON STONE LAYOUT, REBAR LAYOUT, LIMESTONE CAPS, LAMINATED WOOD BEAM, STEEL STRAPPING AND ACCESSORIES AND SIGN BACKER DESIGN.

CONSULTANT:

IOWA DEPARTMENT OF  
NATURAL RESOURCES

ENGINEERING SERVICES - WALLACE BUILDING  
502 E. 9TH ST., DES MOINES, IA 50319-0034  
P: 515.725.8200  
F: 515.725.8202



ENTRY PORTAL SECTIONS & DETAILS

ENTRANCE PORTALS FOR  
HONEY CREEK RESORT SP

APPANOOSE COUNTY, IOWA

12663 RESORT DRIVE

NO. BY DATE REVISION

DRAWN BY: PROJECT NUMBER:  
15-05-63-04

CHK'D BY: DATE:  
04.29.2015

SHEET No:

A-105

07 NOT USED  
SCALE: 3" = 1'-0"

06 ENTRANCE PORTAL BLOCK "B" - PLAN  
SCALE: 1/2" = 1'-0"

05 ENTRANCE PORTAL BLOCK "A" - PLAN  
SCALE: 1/2" = 1'-0"

04 ENTRANCE PORTAL BLOCK "A" - SECTION  
SCALE: 1/2" = 1'-0"

03 ENTRANCE PORTAL BLOCK "B" - SECTION  
SCALE: 1/2" = 1'-0"

02 ENTRANCE PORTAL BLOCK "B" - ELEVATION  
SCALE: 1/2" = 1'-0"

01 ENTRANCE PORTAL BLOCK "A" - ELEVATION  
SCALE: 1/2" = 1'-0"

KEYNOTES

GENERAL NOTES

1. #4 REBAR 24" O.C. ALL DIRECTIONS.
2. 4" THICK, SOLID ROUGH-CUT LIMESTONE BRICK WITH UNCOURSED LEDGE ROCK PATTERN AND BATTERING EFFECT AS SHOWN WITH LIME MORTAR AS SPECIFIED. DIMENSIONS AND SHAPE SHOULD VARY BETWEEN 6" TO 18". ALL STONE TO BE LOCALLY SOURCED, QUARRIED WITHIN 50 MILES OF PROJECT LOCATION. PATTERNING SHOWN FOR DEMONSTRATION PURPOSES ONLY, REFER TO PATTERN SWATCH FOR MORE INFORMATION. 1/2" AIR SPACE WITH CORROSION RESISTANT ANCHORS AND FASTENERS AS REQUIRED. LOCATE WEEP HOLES WHERE REQUIRED. SUBMIT SAMPLES FOR APPROVAL.
3. 6 3/4" EXTERIOR GRADE GLULAM BEAM WITH 2 COATS OF TWP 100 SERIES STAIN FINISH, COLOR TBD. MATCH BEAM DEPTH DIMENSION AS SHOWN.
4. CAST IN PLACE CONCRETE WALL BACKER MONUMENT.
5. NOT USED.
6. 1/2" STAINLESS STEEL BEAM RECEIVER SLEEVE, CAST INTO CONCRETE MONUMENT.
7. 2" SIGN-FOAM STATE PARK SIGN, SUPPLIED BY OWNER, CONTRACTOR INSTALLED WITH 1/2" STAINLESS STEEL FASTENERS.
8. MONOLITHIC SELECT GRADE, BUFF INDIANA LIMESTONE CAP WITH CONTINUOUS COPPER PERIMETER DRIP EDGE AS SHOWN, MATCH DIMENSIONS AS SHOWN. SUBMIT SHOP DRAWINGS.
9. CAST IN PLACE CONCRETE FOUNDATION.
10. COPPER FLASHING WHERE NECESSARY.
11. 2X T&G CEDAR DECKING, STAIN TO MATCH GLULAM BEAM, TWO COATS TWP 100 SERIES. TRIM OUT WITH 1/4" STEEL FRAMING AROUND ENTIRE PERIMETER OF WOOD, EPOXY PAINT BLACK, DRILL WEEP HOLES IN BOTTOM OF FRAME.
12. FUTURE SIGN, DEMONSTRATION ONLY.
13. 3/8" STEEL BEAM COVER AS SHOWN, EPOXY PAINT BLACK.
14. NOT USED.
15. NOT USED.
16. 3/8" CORROSION RESISTANT STEEL STRAP, EPOXY PAINT BLACK.
17. CONTINUOUS BACKER MATERIAL AND POLYURETHANE SEALANT TO MATCH MORTAR.
18. 3/4" STAINLESS STEEL ATTACHMENT BOLTS AND LOCK WASHERS.

- A. FIELD VERIFY ALL DIMENSIONS PRIOR TO CONSTRUCTION.
- B. USE COPPER FLASHING AND WEEP ROPES AT ALL NECESSARY LOCATIONS.
- C. USE CORROSION RESISTANT ACCESSORIES ON ALL TIE-BACK AND ANCHOR LOCATIONS.
- D. USE TYPE "N" LIME MORTAR (ASTM C270) ON ALL MASONRY MORTAR JOINTS.
- E. ALL WOOD PRODUCTS TO RECEIVED TWO COATS OF TWP 100 SERIES STAIN.
- F. SUBMIT SHOP DRAWINGS ON STONE LAYOUT, REBAR LAYOUT, LIMESTONE CAPS, LAMINATED WOOD BEAM, STEEL STRAPPING AND ACCESSORIES AND SIGN BACKER DESIGN.

CONSULTANT:

IOWA DEPARTMENT OF  
NATURAL RESOURCES

ENGINEERING SERVICES - WALLACE BUILDING  
502 E. 9TH ST., DES MOINES, IA 50319-0034  
P: 515.725.8200  
F: 515.725.8202



ENTRANCE PORTAL BLOCKS

ENTRANCE PORTALS FOR  
HONEY CREEK RESORT SP

APPANOOSE COUNTY, IOWA

12663 RESORT DRIVE

NO.	BY	DATE	REVISION

DRAWN BY: PROJECT NUMBER:  
15-05-63-04

CHK'D BY: DATE:  
04.29.2015

SHEET NO:

A-200