

WATER CONTROL STRUCTURE HYDROLOGIC AND HYDRAULIC DESIGN DATA

HYDROLOGIC DATA

Drainage Area: 18,117 Acres

CN: 98/60

Tc: 9.5 HRS (Knapp Creek Watershed)

% Imperious: 1

DATA FOR TECH BULLETIN NO. 16:

Emergency Spillway Elev. 693.5ft Principal Spillway Elev. 693.5ft

Channel Elev. Below Spillway Elev. 686.0ft

Low Hazard Dam not Major Structure Criteria:

(Dam Ht.) 7.5 ft. x (total storage) 564 Ac. Ft. = 4230 > 3,000

Freeboard Design Flood:

Rainfall = P100 + 0.12 (PMP-P100)

= 6.55 in. + 0.12 (32 in. - 6.55 in.)

= 9.60in in. 24 hr. duration

DESIGN CREST ELEVATION: Elev. 696.00'

Q100 = 2077 CFS 24hr. duration - HWL100yr 694.85

Spillway Peak Flow: 1025 CFS

OTHER HYDRAULIC DATA:

Time to remove 25 yr. - 24 hr. storm (5.25 inches) at spillway

Elev. 694.52 is 18hrs to Elev. 693.5

Q25 Spillway: 1187 CFS

NOTES:

The emergency spillway crest elevation (693.5) is set the same as the Principal Spillway Crest (693.5) for the following reasons:

1. The existing topography does not allow us to go much higher than 696 for the top of berm.
2. The design crest elevation rainfall (8.9-inches) produces a HWL (EL 696.69) which is too high due to the large drainage area (18,177 acres - Knapp Creek Watershed). Even with the diversion structure, the flow is too large for the proposed wetland storage, unless the emergency spillway crest is set the same as the principal spillway crest.
3. A variance is requested to allow the emergency spillway crest be the same as the principal spillway, thus keeping the HWL for the crest design rainfall below the berm crest of EL 696. This appears reasonable since the entire proposed wetland is within the Coralville Reservoir and only 1,000 feet from the Iowa River.

Hawkeye Wildlife Area Diversion Table

elevation, ft.	H, ft.	Total Weir Length=147ft. Knapp Creek			Total Weir Length=125ft. Total Stoplog Length -10ft. Flows to Proposed Wetland			total flow SW	Diversion, Q _D
		Q= Ca(2gH) ^{0.5}	Q=CLH ^{3/2}	a=10*H	Q= Ca(2gH) ^{0.5}	Q=CLH ^{3/2}	total Q		
		H ₂ =H/2 (all stoplogs in)	H ₃ =H-699		H ₂ =H/2				
694	0.0	0		0	0	0	0	0	
695	1.0	0		10	34	0	34	0	
696	2.0	0		20	96	0	96	0	
697	3.0	0		30	177	0	177	0	
698	4.0	0		40	272	0	272	0	
699.0	5.0	0	0	50	381	0	381	0	
699.5	5.5	0	156	55	439	133	728	156	
700.0	6.0	0	441	60	500	375	1316	441	
700.5	6.5	0	810	65	564	689	2063	810	
701.0	7.0	0	1247	70	631	1061	2939	1247	
701.5	7.5	0	1743	75	699	1482	3925	1743	
702.0	8.0	0	2292	80	770	1949	5010	2292	
702.5	8.5	0	2888	85	844	2455	6187	2888	
703.0	9.0	0	3528	90	919	3000	7447	3528	

ESTIMATED QUANTITIES			
PHASE 1 - WEST 3900 FEET OF BERM			
NO.	DESCRIPTION	QTY	UNITS
1	Mobilization	1	LS
2	Clearing & Grubbing	14	AC
3	Class 10 Excavation , Waste (2 ft. topsoil & core trench)	37,128	CY
4	Berm Construction, Class 10 Excavation (from borrow area)	76,991	CY
5	Seeding & Mulching Berm	10	AC
6	Silt Fencing	4,620	LF
7	Implement Stormwater Pollution Prevention Plan	1	LS
PHASE 2 - EAST 5500 FEET OF BERM & WATER CONTROL STRUCTURES			
NO.	DESCRIPTION	QTY	UNITS
1	Mobilization	1	LS
2	Clearing & Grubbing	20	AC
3	Class 10 Excavation , Waste (2 ft. topsoil & core trench)	19,031	CY
4	Berm Construction, Class 10 Excavation (from borrow area)	84,850	CY
5	Berm Construction Class 10 Excavation (adjacent fill material)	15,000	CY
6	10' x 10' Precast RCBC W/top	24	LF
7	10' x 10' Precast RCBC no top	48	LF
8	Sheet Piling	1,420	SF
9	Curtain Walls (Precast Concrete)	6.4	CY
10	Aluminum Stoplog Guides	730	LBS
11	Aluminum Stoplogs & Aluminum Hooks	700	LBS
12	Stoplog & Hook Storage	1	LS
13	Geotextile	600	SY
14	Rip Rap	360	TN
15	P.C.C. Grout for Rip Rap	71	CY
16	Seeding & Mulching Berm	24	AC
17	Crushed Rock Surfacing	42	TN
18	Silt Fence	4,620	LF
19	Implement Stormwater Pollution Prevention Plan	1	LS
EMERGENCY SPILLWAY			
20	8" P.C.C. Spillway Crest W/wire	652	SY
21	Geotextile	6,125	SY
22	Rip Rap	3,695	TN
23	P.C.C. Grout	685	CY

PRELIMINARY

GENERAL PURPOSE
SITE PLAN

HAWKEYE WILDLIFE
MANAGEMENT AREA WATER
QUALITY & WETLAND PROJECT

JOHNSON COUNTY, IOWA

IDN 1412024

AUG. 2012

ISSUED

REVISIONS

.

.

.

.

ENGINEER

BWJ

DRAWN BY

RJS

CHECKED BY

BWJ

FIELD BOOK NO.




FIELDBOOK

DRAWING NO.

SP-01


SHEET NO.

03 / 12

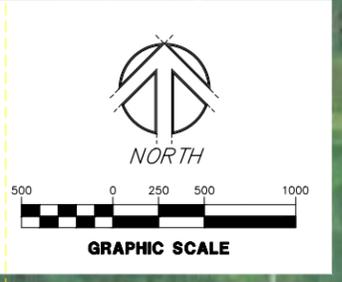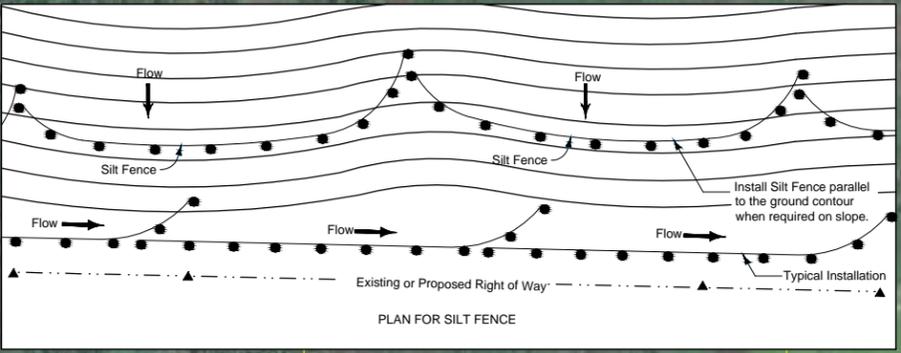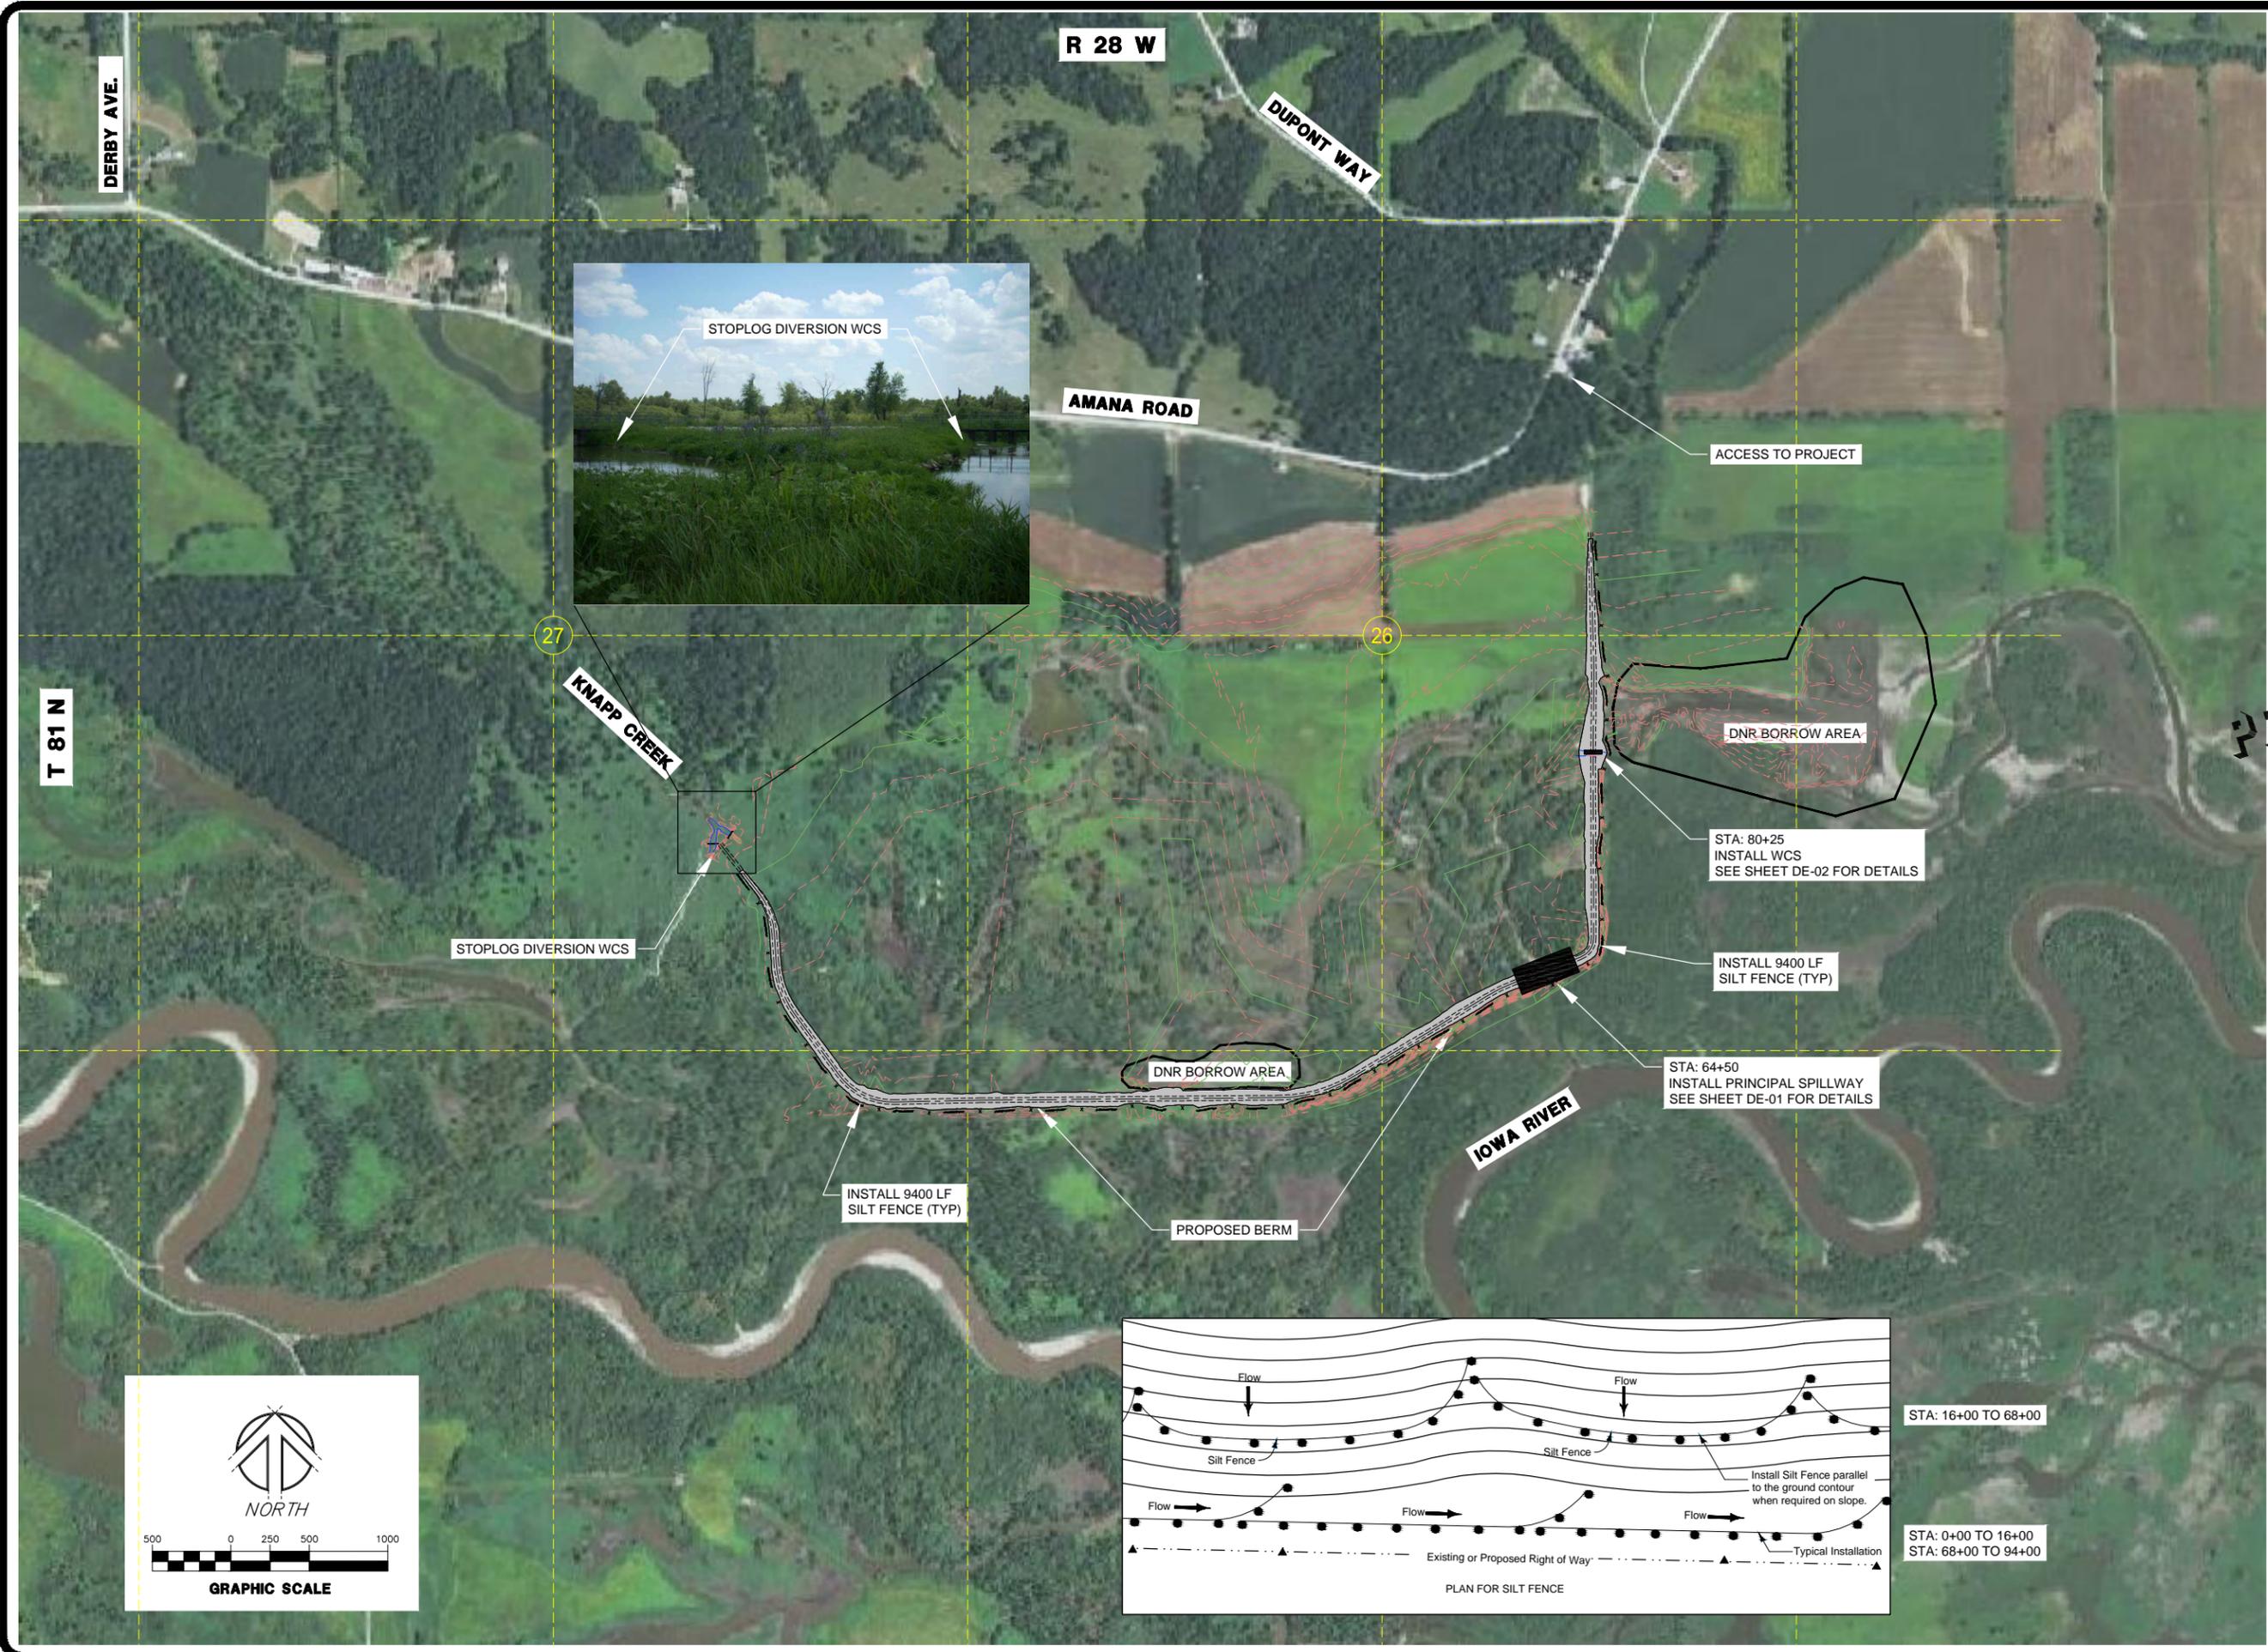

STA: 16+00 TO 68+00

STA: 0+00 TO 16+00
STA: 68+00 TO 94+00

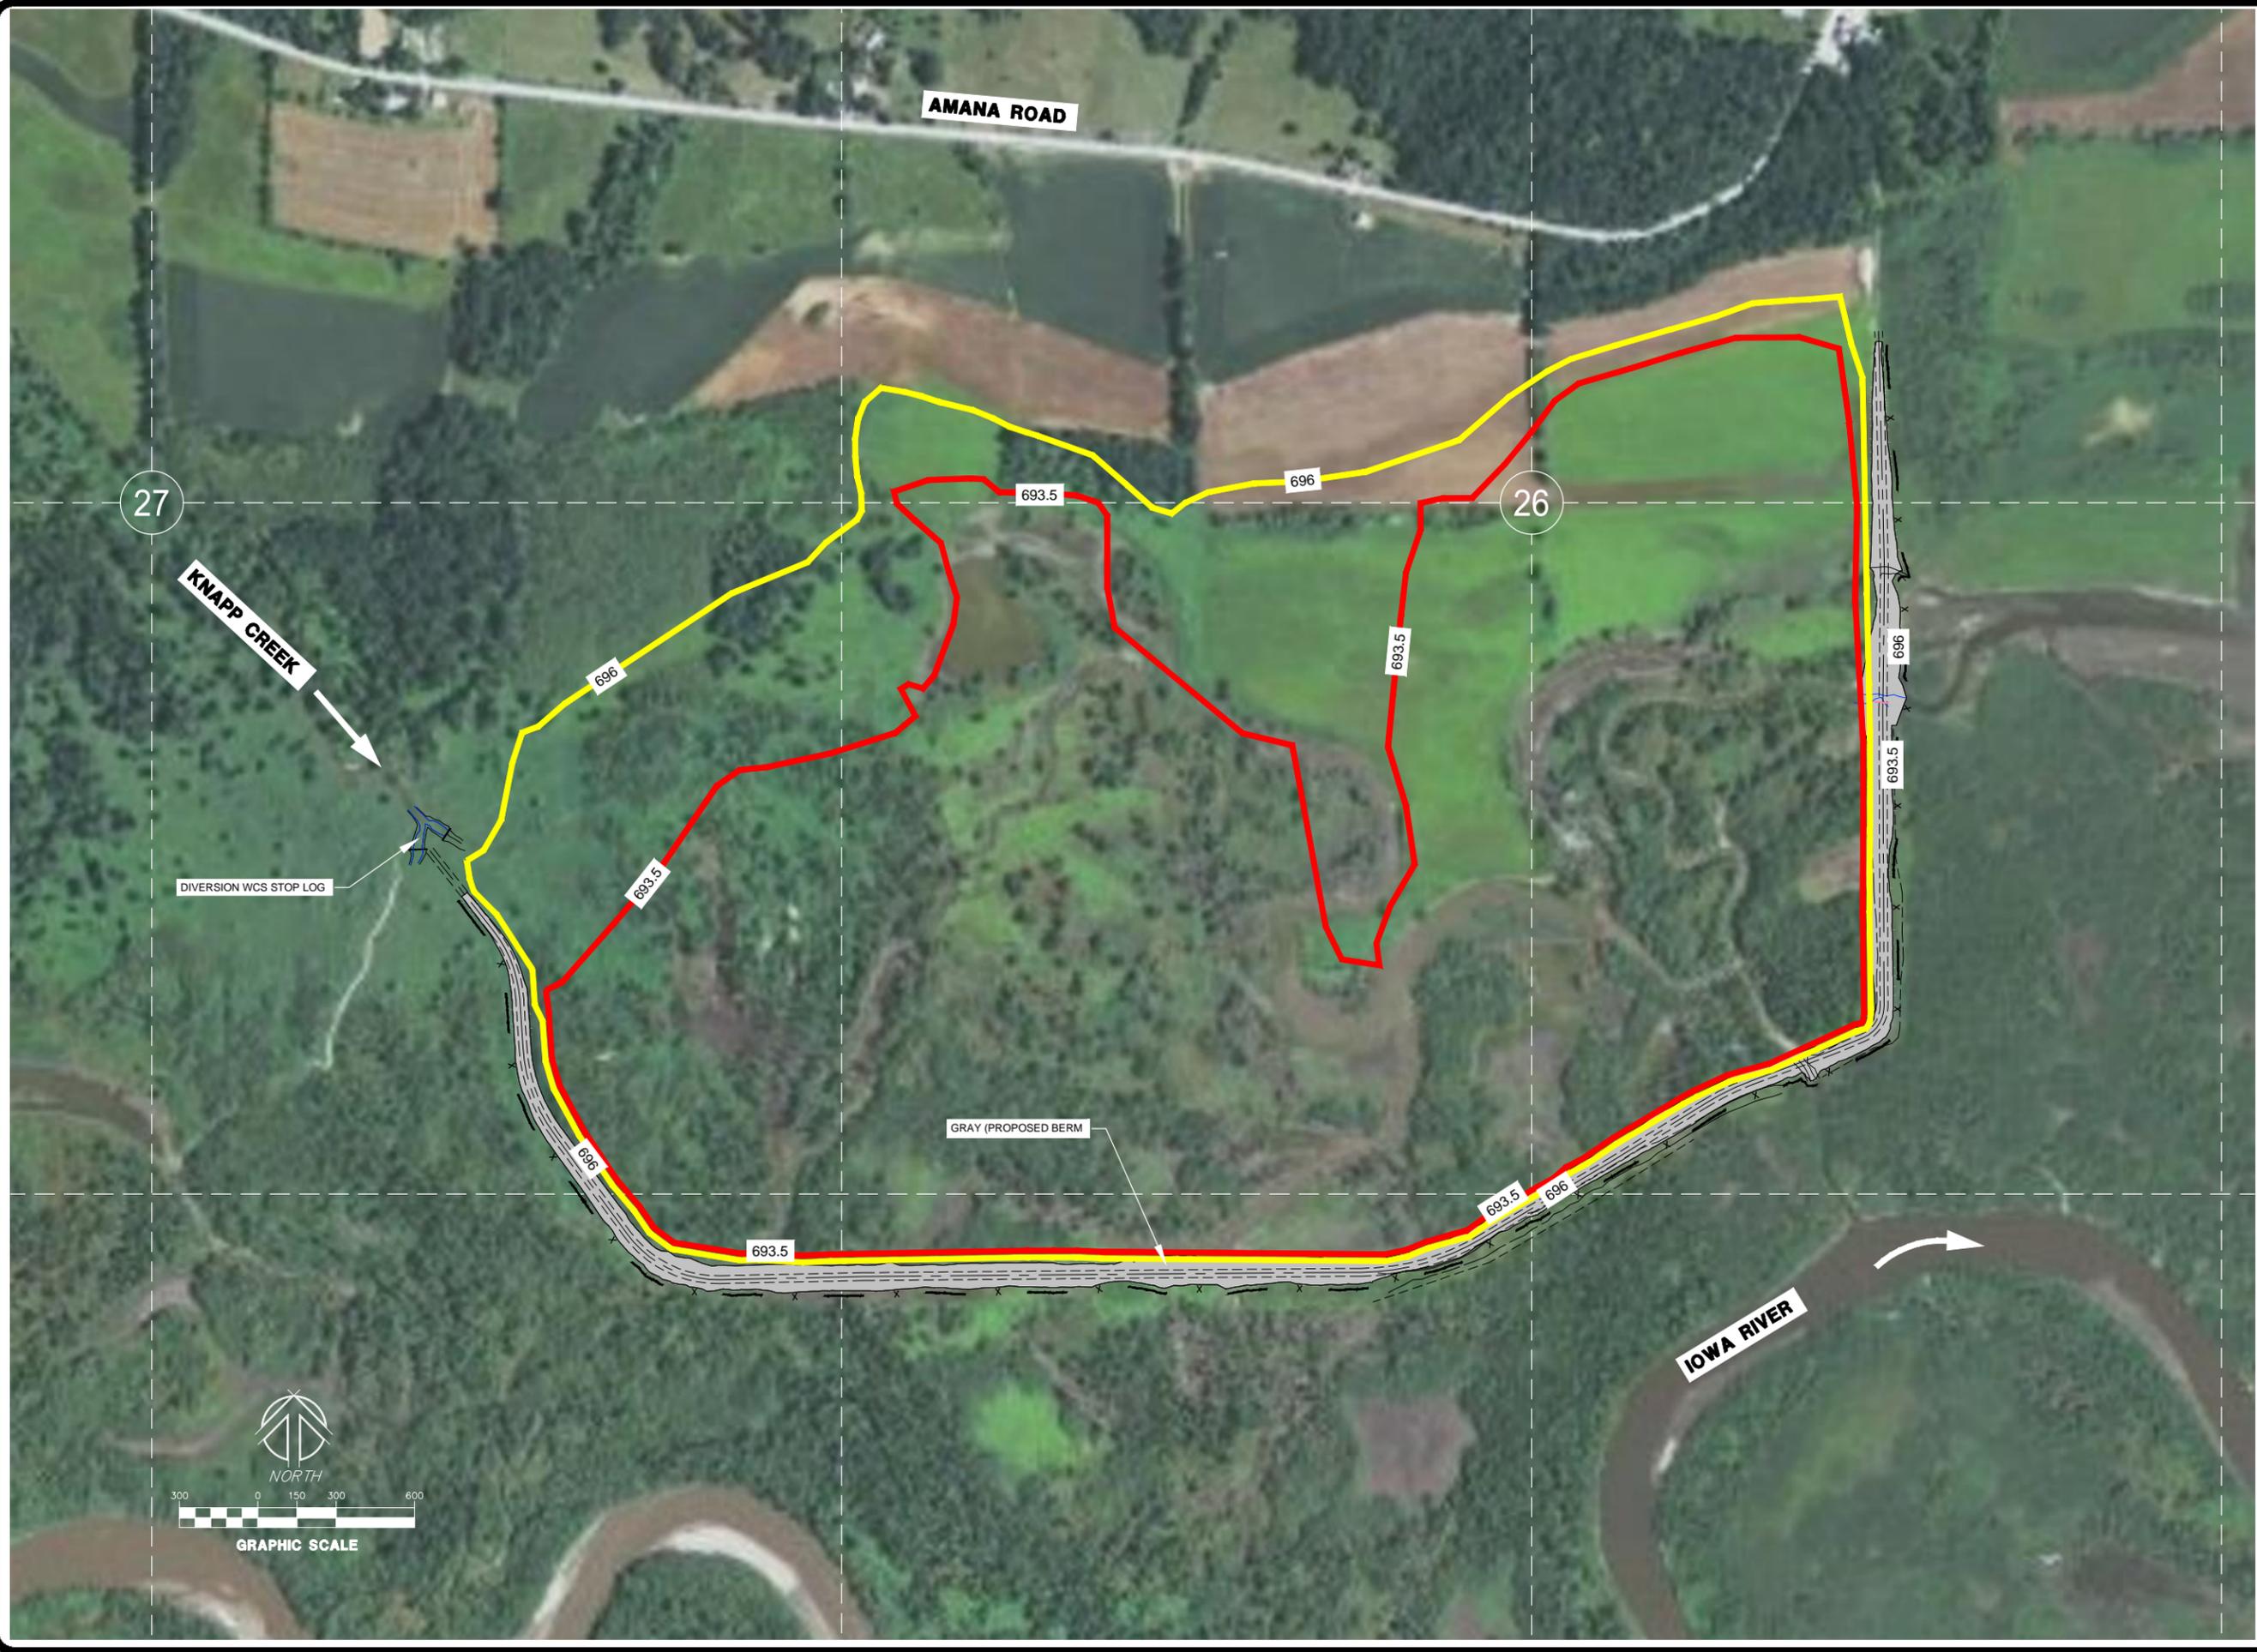

building **strong** communities.

705 First Avenue North
 Fort Dodge, Iowa 50501
 515-576-7155
 fax 515-576-4235

NOTICE:
 McClure Engineering Company waives any and all responsibility and liability for problems which arise from failure to follow these Plans, Specifications, and the engineering intent they convey, or for problems which arise from failure to obtain and/or follow the engineers guidance with respect to any errors, omissions, inconsistencies, ambiguities, or conflicts which are alleged.

COPYRIGHT:
 Copyright and property rights in these documents are expressly reserved by McClure Engineering Company. No reproductions, changes, or copies in any manner shall be made without obtaining prior written consent from McClure Engineering Company.

**GENERAL CONTOUR
 SITE PLAN**

**HAWKEYE WILDLIFE
 MANAGEMENT AREA WATER
 QUALITY & WETLAND PROJECT**

JOHNSON COUNTY, IOWA

IDN 1412024

AUG. 2012

ISSUED

REVISIONS

- .
- .
- .
- .

ENGINEER
 BWJ

DRAWN BY
 RJS

CHECKED BY
 BWJ

FIELD BOOK NO.
 FIELDBOOK

DRAWING NO.

SHEET NO.

SP-02

04 / 12

POLLUTION PREVENTION PLAN

110-12A

All contractors/subcontractors shall conduct their operations in a manner that minimizes erosion and prevents sediments from leaving the project site. The prime contractor shall be responsible for compliance and implementation of the Pollution Prevention Plan (PPP) for their entire contract. This responsibility shall be further shared with subcontractors whose work is a source of potential pollution as defined in this PPP.

1. SITE DESCRIPTION

This Pollution Prevention Plan (PPP) is for the construction of a Earthen berm & WCS in Coralville Reservoir, Johnston County Iowa. This PPP covers approximately 357 acres with an estimated 33 acres being disturbed. The portion of the PPP covered by this contract has 33 acres disturbed.

The PPP is located in an area of one soil association (Fluvaquents). The estimated average SCS runoff curve number for this PPP after completion will be 70.

Refer to the project plan for locations of typical slopes, ditch grades, and major structural and non- structural controls. A copy of this plan will be on file at the project engineer's office. Runoff from this work will flow into ditches and unnamed tributaries which flow into the Iowa River.

POTENTIAL SOURCES OF POLLUTION:

Site sources of pollution generated as a result of this work relate to silts and sediment which may be transported as a result of a storm event. However, this PPP provides conveyance for other (non-project related) operations. These other operations have storm water runoff, the regulation of which is beyond the control of this PPP. Potentially this runoff can contain various pollutants related to site-specific land uses. Examples are:

Rural Agricultural Activities:

Runoff from agricultural land use can potentially contain chemicals including herbicides, pesticides, fungicides and fertilizers.

Commercial and Industrial Activities:

Runoff from commercial, industrial and commerce land use may contain constituents associated with the specific operation. Such operations are subject to potential leaks and spills which could be commingled with run-off from the facility. Pollutants associated with commercial and industrial activities are not readily available since they are typically proprietary.

2. CONTROLS

At locations where run off can move offsite, silt fence shall be placed along the perimeter of the areas to be disturbed prior to beginning grading, excavation or clearing and grubbing operations.. Vegetation in areas not needed for construction shall be preserved. As areas reach their final grade, additional silt fences, silt basins, intercepting ditches, sod flumes, letdowns, bridge end drains, and earth dikes shall be installed as specified in the plans and/or as required by the project engineer. This will include using silt fence as ditch checks and to protect intakes. Temporary stabilizing seeding shall be completed as the disturbed areas are constructed. If construction activity is not planned to occur in a disturbed area for at least 21 days, the area shall be stabilized by temporary seeding or mulching within 14 days. Other stabilizing methods shall be used outside the seeding time period.

This work shall be done in accordance with Section 9040 of the Standard Specification.

As the work progresses, additional erosion control items may be required as determined by the contractor after field investigation. The contractor will complete the construction with the establishment of permanent perennial vegetation of all disturbed areas.

3. OTHER CONTROLS

Contractor disposal of unused construction materials and construction material wastes shall comply with applicable state and local waste, disposal, sanitary sewer, or septic system regulations. In the event of a conflict with other governmental laws, rules and regulations, the more restrictive laws, rules or regulations shall apply.

APPROVED STATE OR LOCAL PLANS:

During the course of this construction, it is possible that situations will arise where unknown materials will be encountered. When such situations are encountered, they will be handled according to all federal, state and local regulations in effect at the time.

4. MAINTENANCE

The contractor is required to maintain all temporary erosion control measures in proper working order, including cleaning, repairing, or replacing them throughout the contract period. Cleaning of silt control devices shall begin when the features have lost 50% of their capacity.

5. INSPECTIONS

Inspections shall be made jointly by the contractor and the contracting authority every seven calendar days and after each rain event that is 1/2" or greater. The contractor shall immediately begin corrective action on all deficiencies found. The findings of this inspection shall be recorded in the project diary. This PPP may be revised based on the findings of the inspection. The contractor shall implement all revisions. All corrective actions shall be completed within 3 calendar days of the inspection.

6. NON-STORM DISCHARGES

This includes subsurface drains (i.e. longitudinal and standard subdrains), slope drains and bridge end drains. The velocity of the discharge from these features may be controlled by the use of patio blocks, Class A stone or erosion stone.



building strong communities.

705 First Avenue North
Fort Dodge, Iowa 50501
515-576-7155
fax 515-576-4235

NOTICE
McClure Engineering Company waives any and all responsibility and liability for problems which arise from failure to follow these Plans, Specifications, and the engineering intent they convey, or for problems which arise from failure to obtain and/or follow the engineers guidance with respect to any errors, omissions, inconsistencies, ambiguities, or conflicts which are alleged.

COPYRIGHT:
Copyright and property rights in these documents are expressly reserved by McClure Engineering Company. No reproductions, changes, or copies in any manner shall be made without obtaining prior written consent from McClure Engineering Company.

SWWPP

HAWKEYE WILDLIFE
MANAGEMENT AREA WATER
QUALITY & WETLAND PROJECT

JOHNSON COUNTY, IOWA

IDN 1412024

AUG. 2012

ISSUED

REVISIONS

.

.

.

.

ENGINEER

BWJ

DRAWN BY

RJS

CHECKED BY

BWJ

FIELD BOOK NO.





FIELDBOOK

DRAWING NO.

SP-03

SHEET NO.

05 / 12

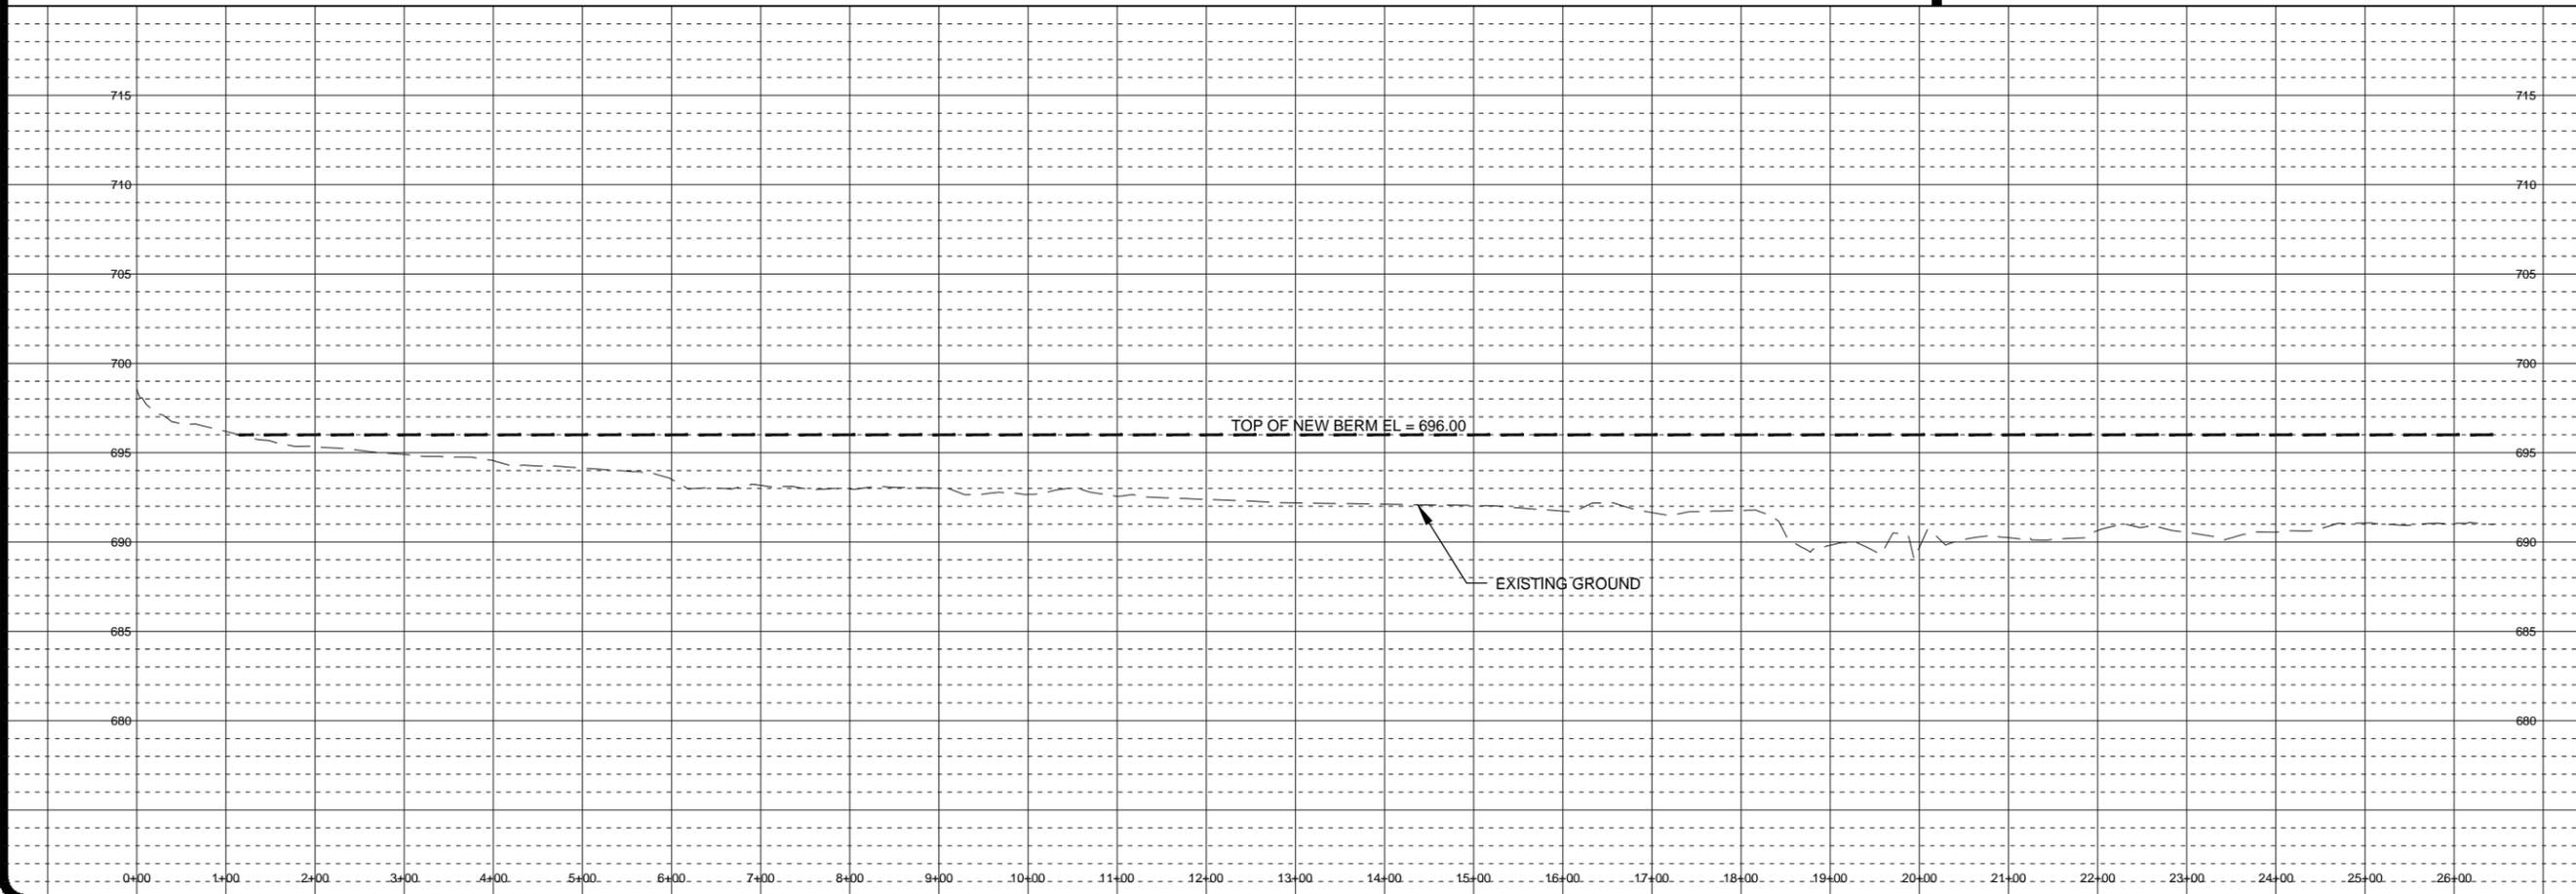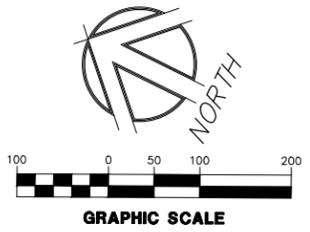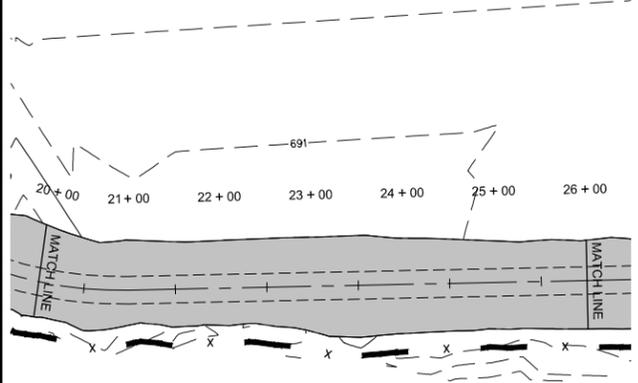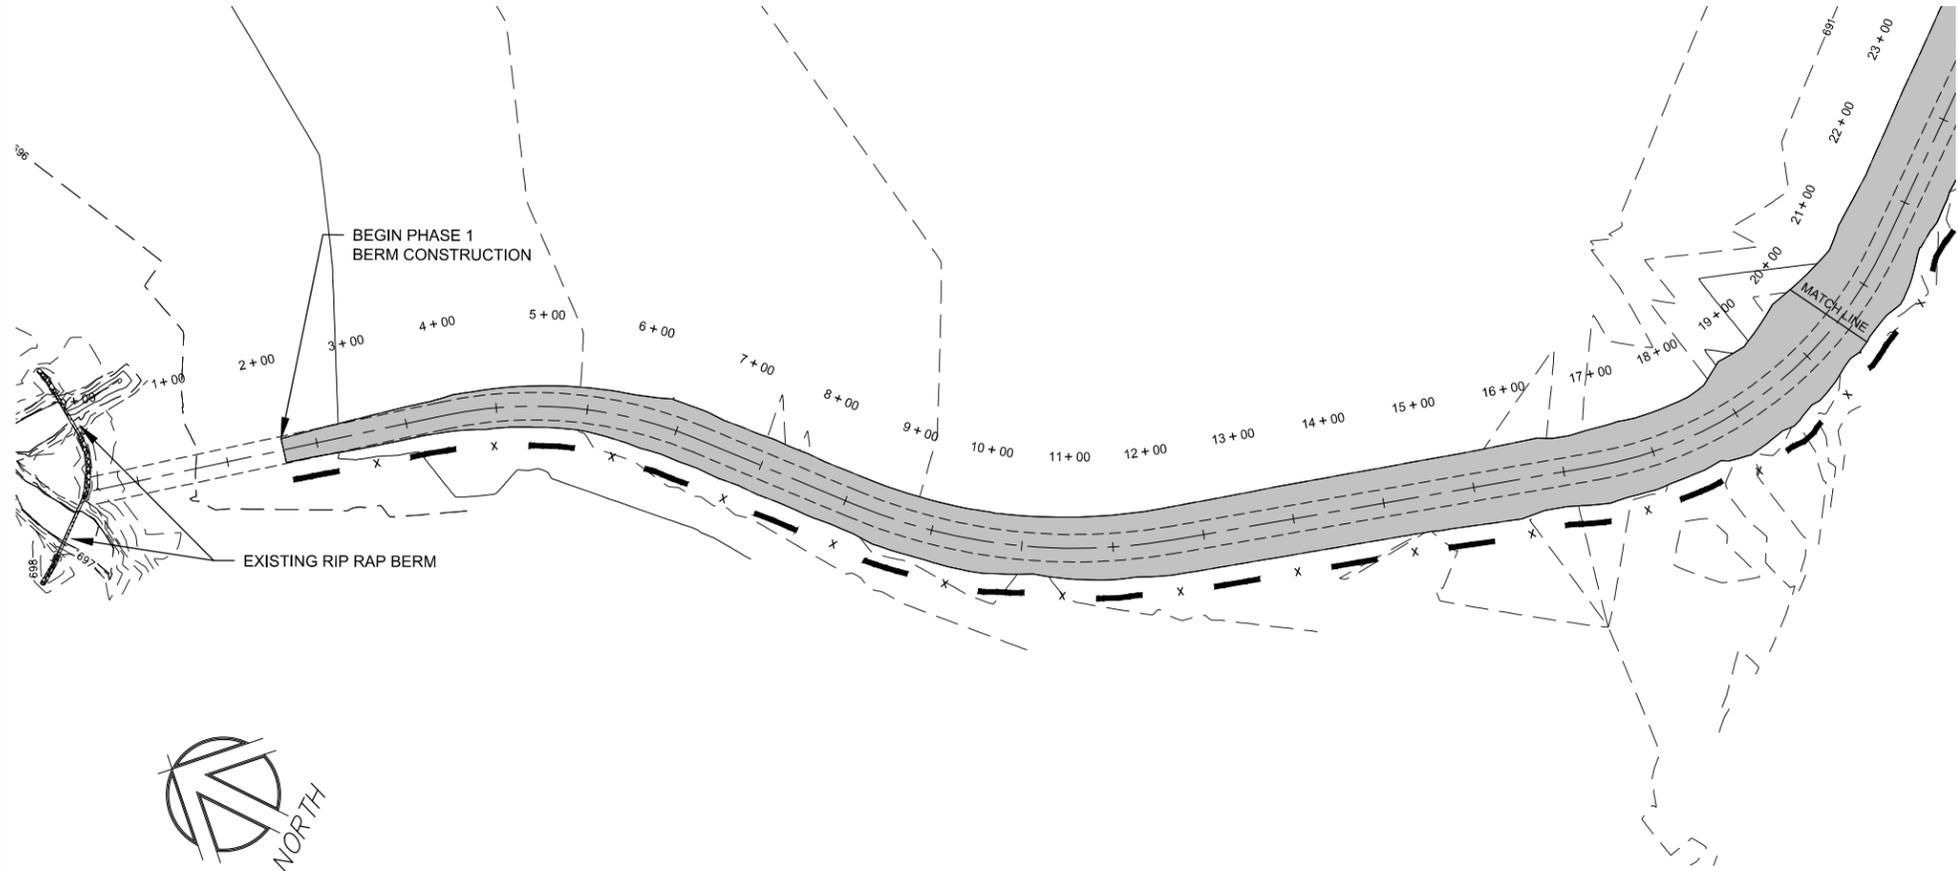

building strong communities.

705 First Avenue North
Fort Dodge, Iowa 50501
515-576-7155
fax 515-576-4235

NOTICE:
McClure Engineering Company waives any and all responsibility and liability for problems which arise from failure to follow these Plans, Specifications, and the engineering interest they convey, or for problems which arise from failure to obtain and/or follow the engineers guidance with respect to any errors, omissions, inconsistencies, ambiguities, or conflicts which are alleged.

COPYRIGHT:
Copyright and property rights in these documents are expressly reserved by McClure Engineering Company. No reproductions, changes, or copies in any manner shall be made without obtaining prior written consent from McClure Engineering Company.

**PROPOSED BERM
PLAN AND PROFILE**

**HAWKEYE WILDLIFE
MANAGEMENT AREA WATER
QUALITY & WETLAND PROJECT**

JOHNSON COUNTY, IOWA

IDN 1412024

AUG. 2012

ISSUED

REVISIONS

.

.

.

.

ENGINEER
BWJ

DRAWN BY
RJS

CHECKED BY
BWJ

FIELD BOOK NO.
FIELDBOOK

DRAWING NO.




SHEET NO.

PP-01

06 / 12

NOTICE:
McClure Engineering Company waives any and all responsibility and liability for problems which arise from failure to follow these Plans, Specifications, and the engineering interest they convey, or for problems which arise from failure to obtain and/or follow the engineers guidance with respect to any errors, omissions, inconsistencies, ambiguities, or conflicts which are alleged.

COPYRIGHT:
Copyright and property rights in these documents are expressly reserved by McClure Engineering Company. No reproductions, changes, or copies in any manner shall be made without obtaining prior written consent from McClure Engineering Company.

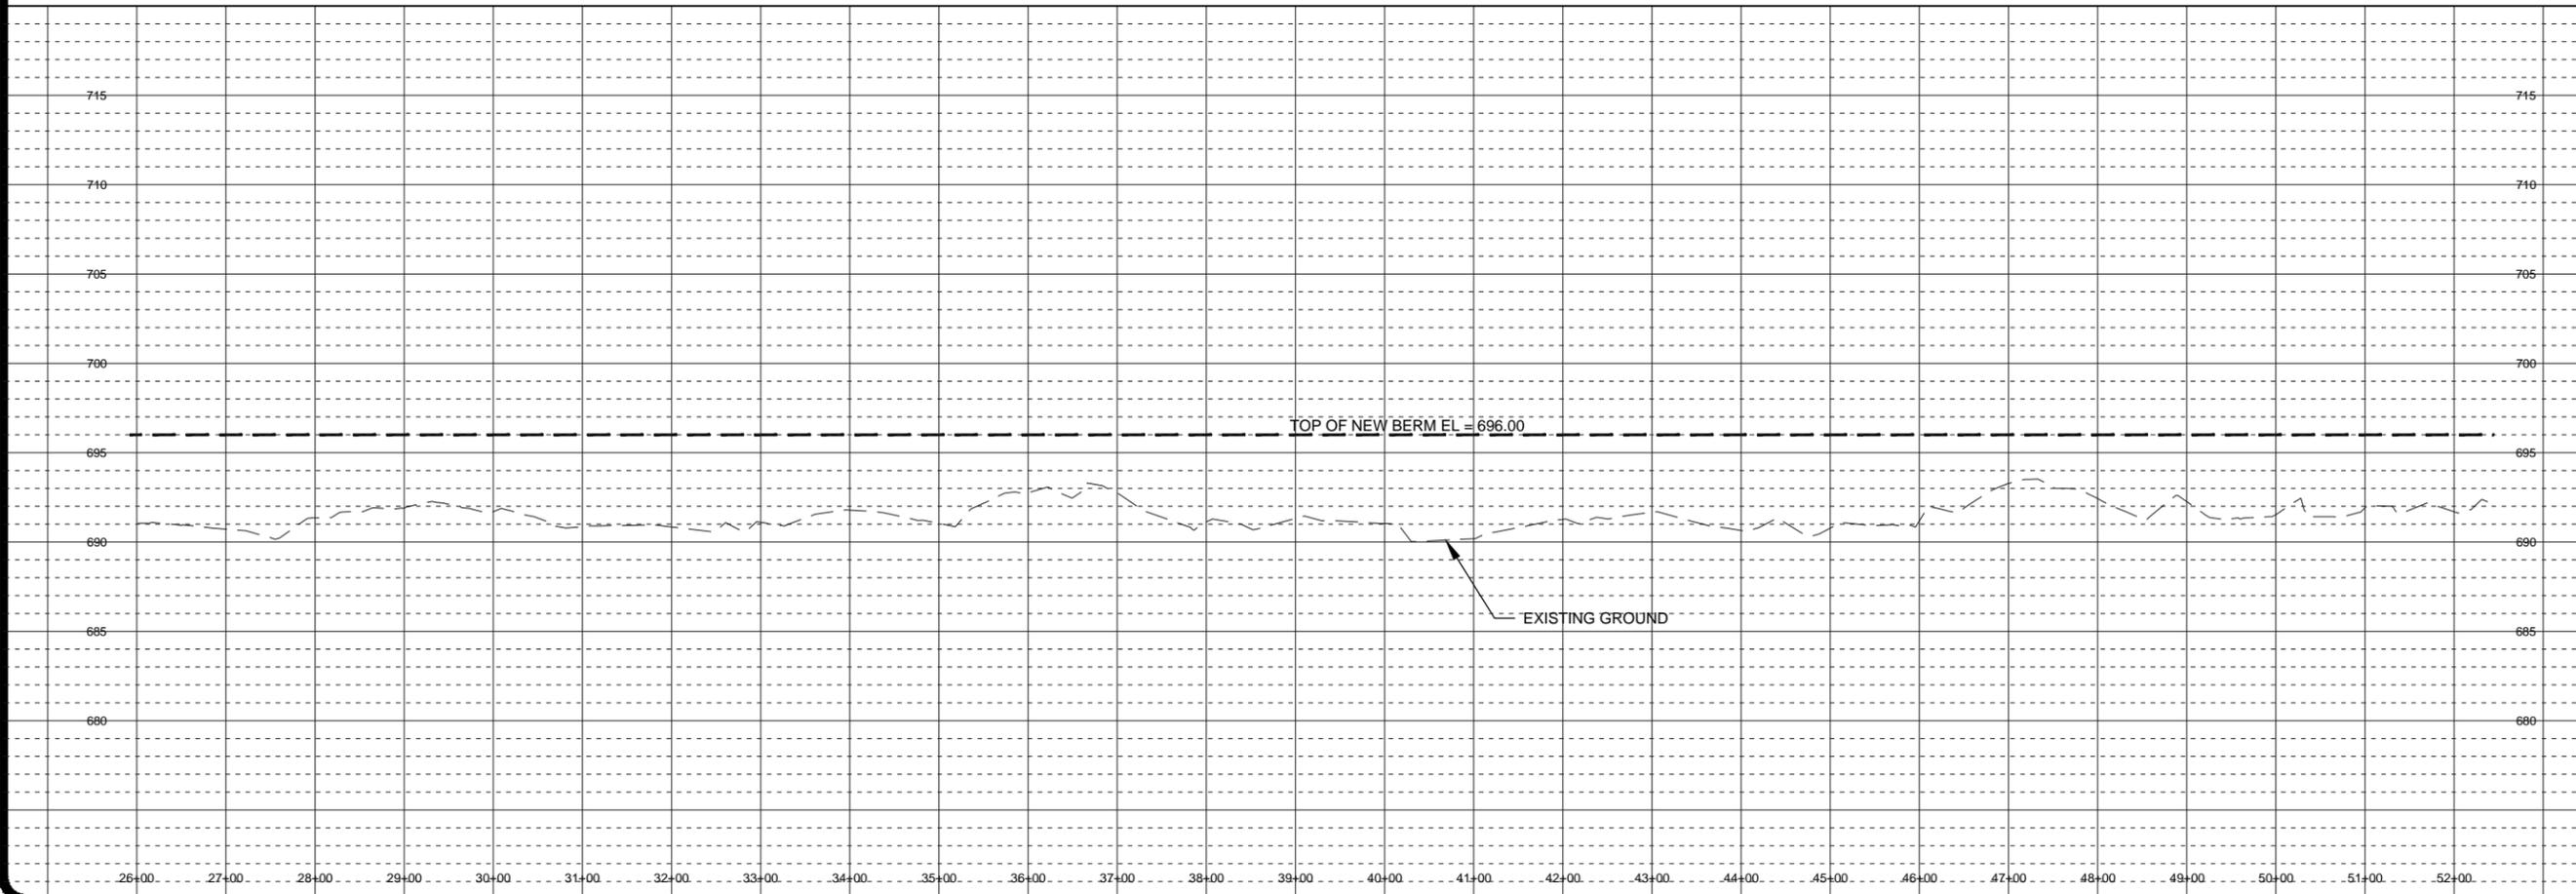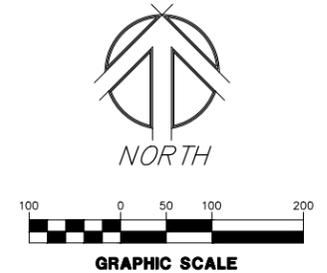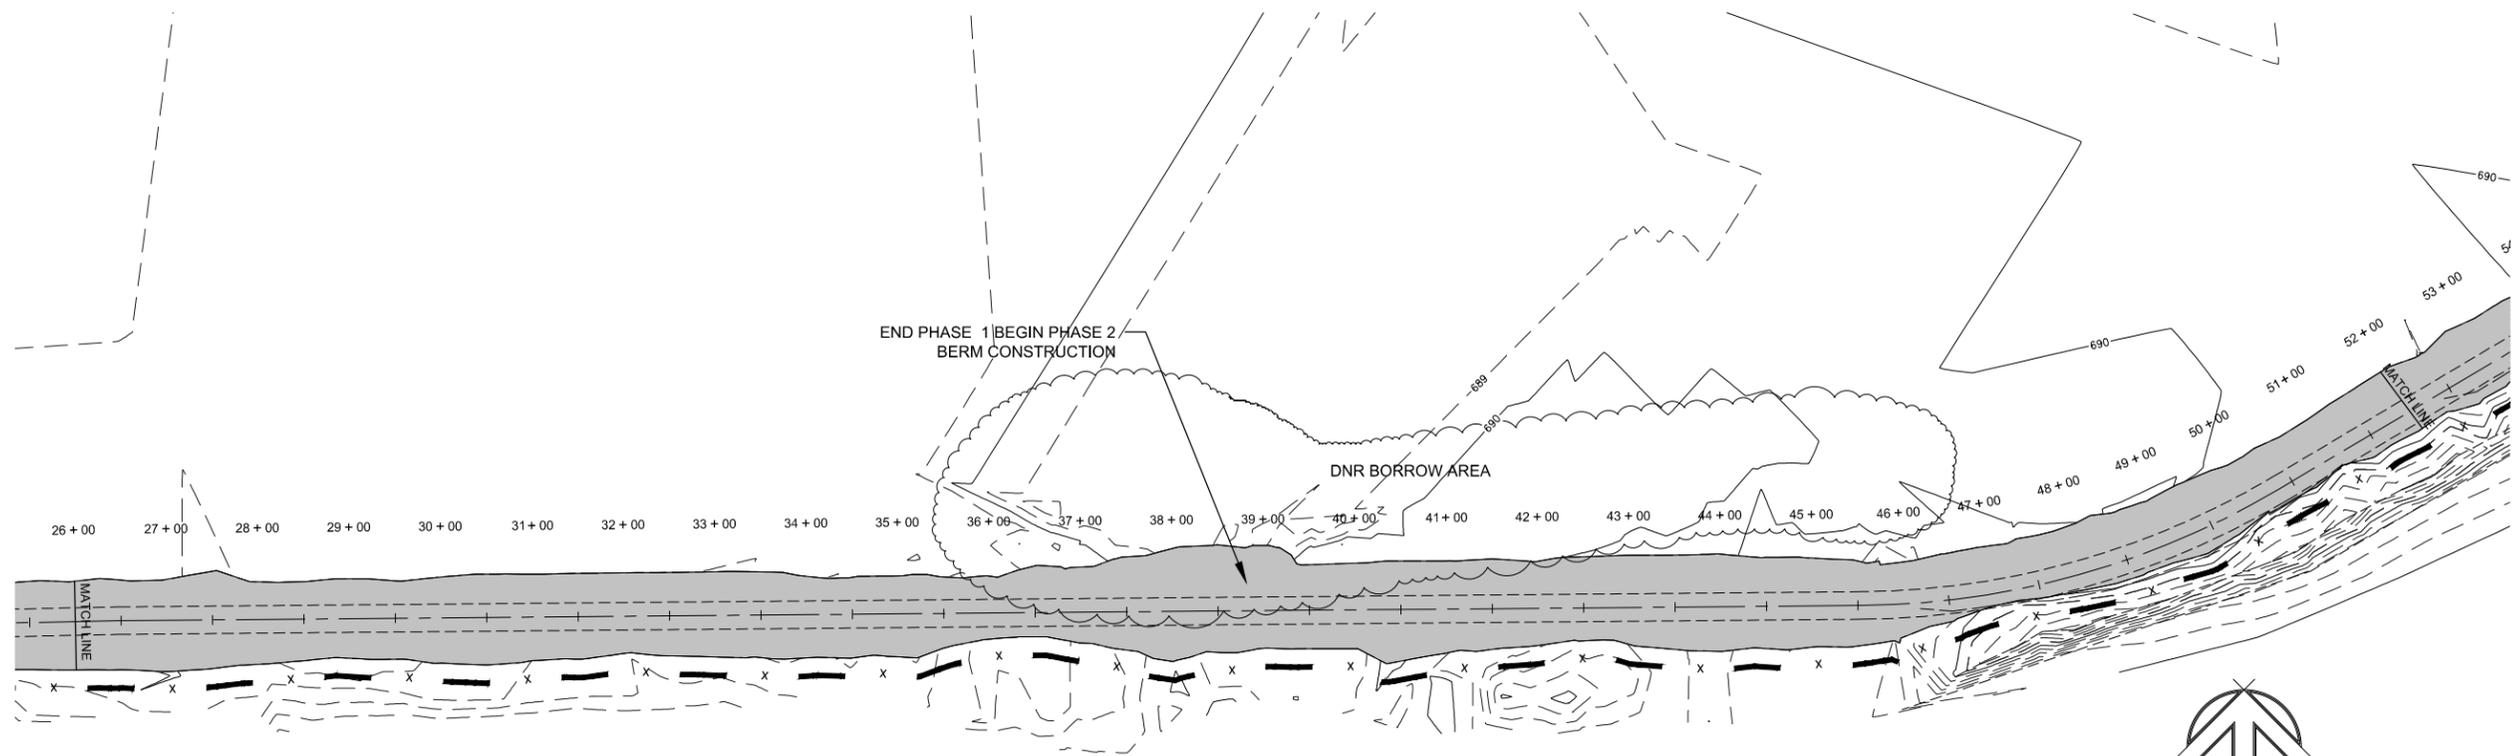

**PROPOSED BERM
PLAN AND PROFILE**


**HAWKEYE WILDLIFE
MANAGEMENT AREA WATER
QUALITY & WETLAND PROJECT**

JOHNSON COUNTY, IOWA
IDN 1412024
AUG. 2012
ISSUED

REVISIONS
.
.
.



ENGINEER: BWJ
DRAWN BY: RJS
CHECKED BY: BWJ
FIELD BOOK NO.: FIELDBOOK

DRAWING NO.: PP-02
SHEET NO.: 07 / 12


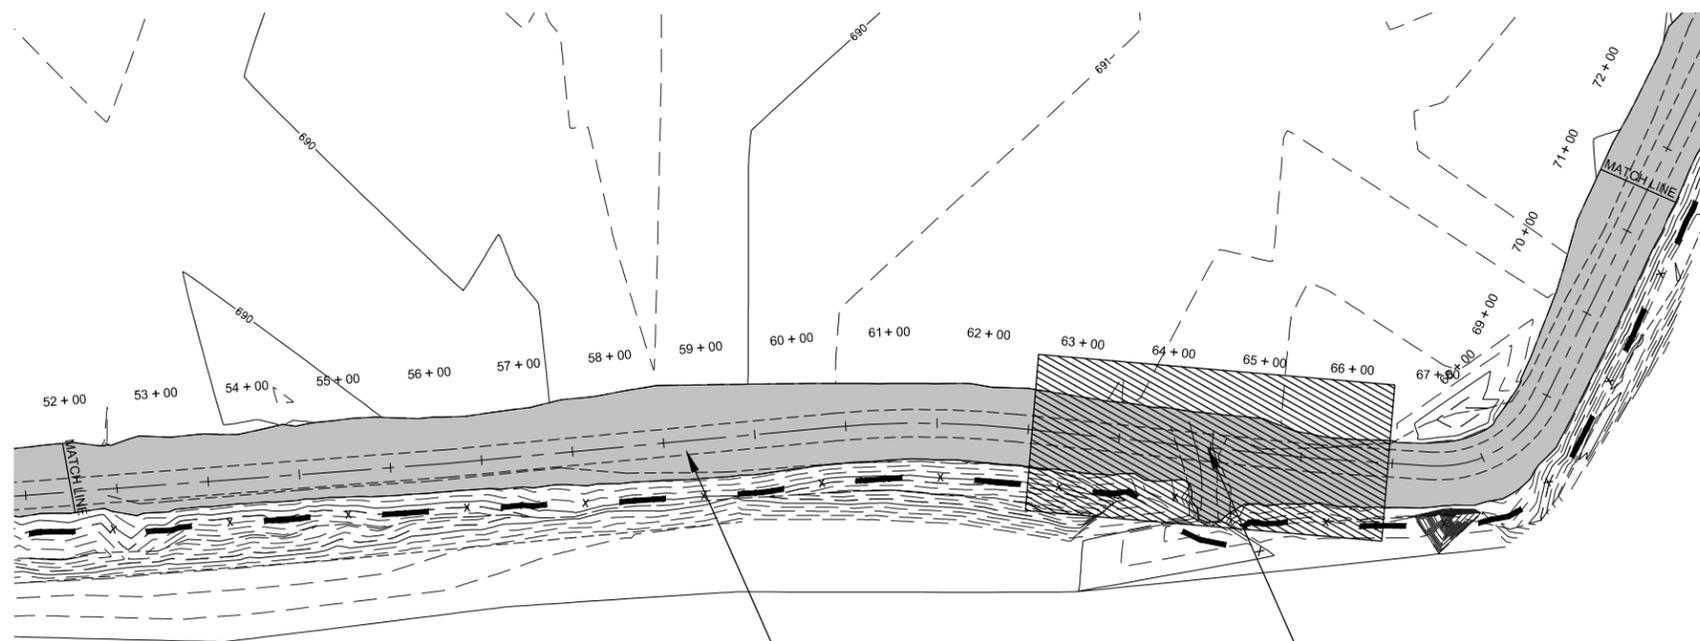


PHASE 2 BERM CONSTRUCTION

STA: 64+50
CONSTRUCT EMERGENCY SPILLWAY

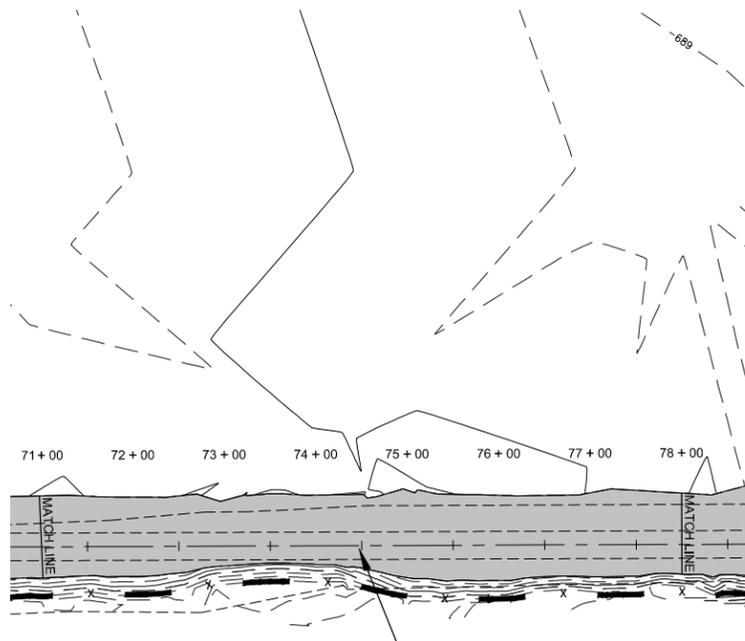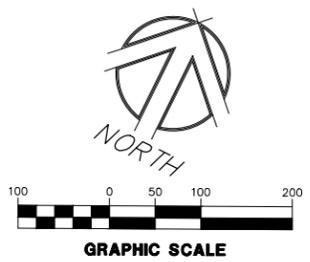

PHASE 2 BERM CONSTRUCTION

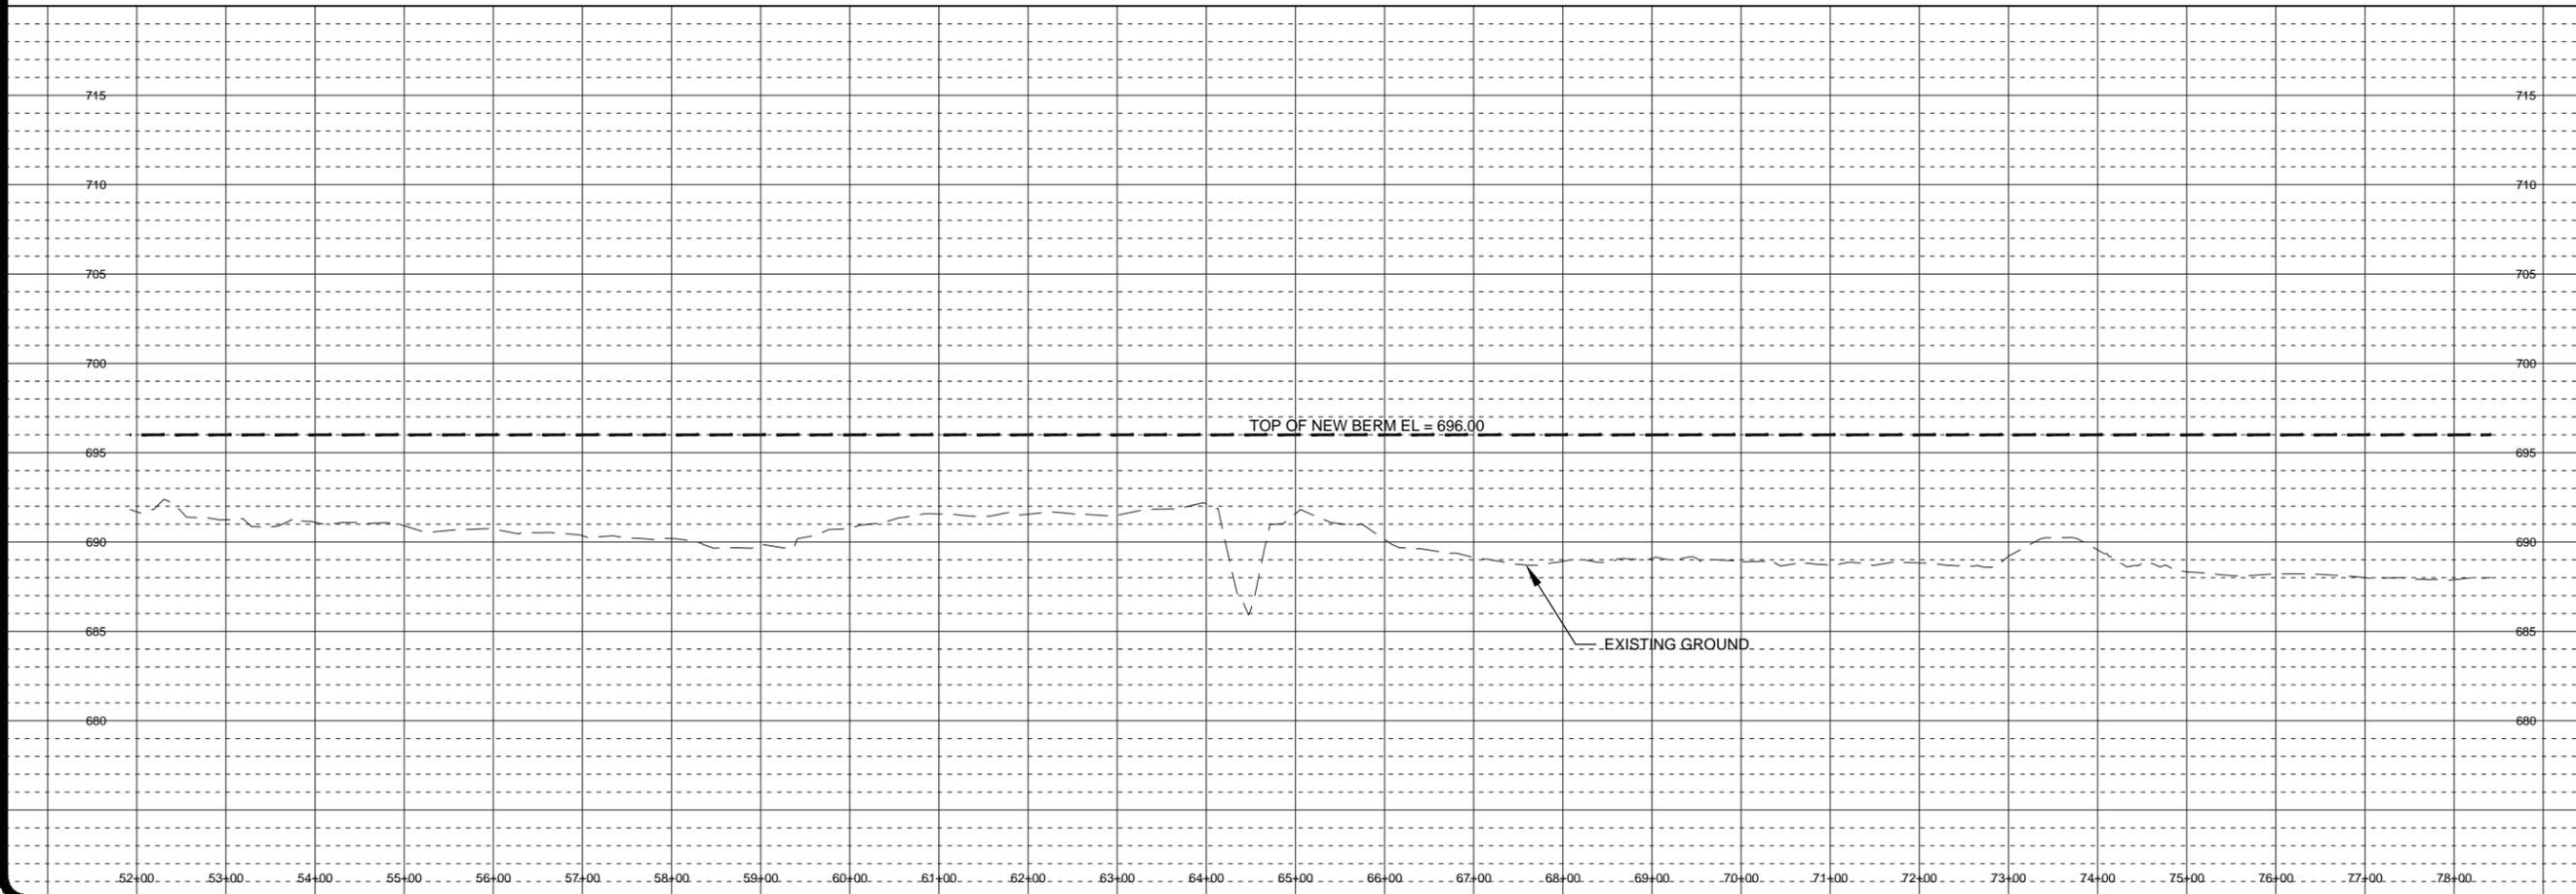

building strong communities.

705 First Avenue North
Fort Dodge, Iowa 50501
515-576-7155
fax 515-576-4235

NOTICE:
McClure Engineering Company waives any and all responsibility and liability for problems which arise from failure to follow these Plans, Specifications, and the engineering intent they convey, or for problems which arise from failure to obtain and/or follow the engineers guidance with respect to any errors, omissions, inconsistencies, ambiguities, or conflicts which are alleged.

COPYRIGHT:
Copyright and property rights in these documents are expressly reserved by McClure Engineering Company. No reproductions, changes, or copies in any manner shall be made without obtaining prior written consent from McClure Engineering Company.

**PROPOSED BERM
PLAN AND PROFILE**

**HAWKEYE WILDLIFE
MANAGEMENT AREA WATER
QUALITY & WETLAND PROJECT**

JOHNSON COUNTY, IOWA

IDN 1412024

AUG. 2012

ISSUED

REVISIONS

.

.

.

.

ENGINEER
BWJ

DRAWN BY
RJS

CHECKED BY
BWJ

FIELD BOOK NO.
FIELDBOOK

DRAWING NO.


SHEET NO.

PP-03


08 / 12

NOTICE:
McClure Engineering Company waives any and all responsibility and liability for problems which arise from failure to follow these Plans, Specifications, and the engineering intent they convey, or for problems which arise from failure to obtain and/or follow the engineers guidance with respect to any errors, omissions, inconsistencies, ambiguities, or conflicts which are alleged.

COPYRIGHT:
Copyright and property rights in these documents are expressly reserved by McClure Engineering Company. No reproductions, changes, or copies in any manner shall be made without obtaining prior written consent from McClure Engineering Company.

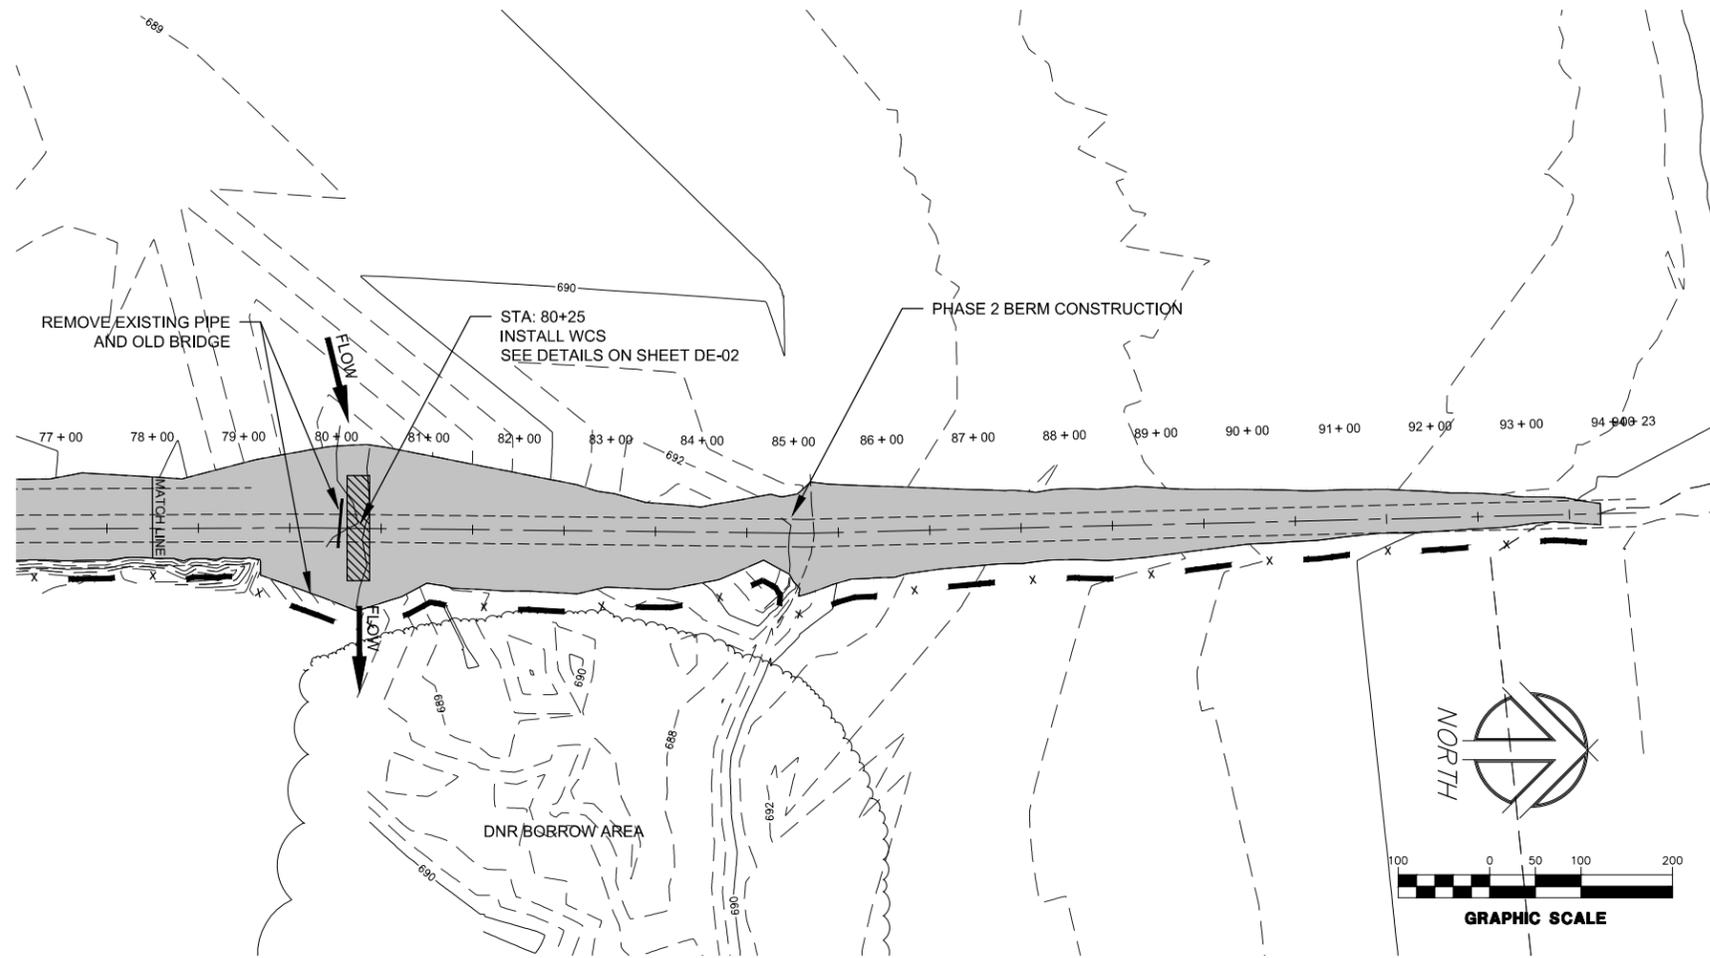

PROPOSED BERM

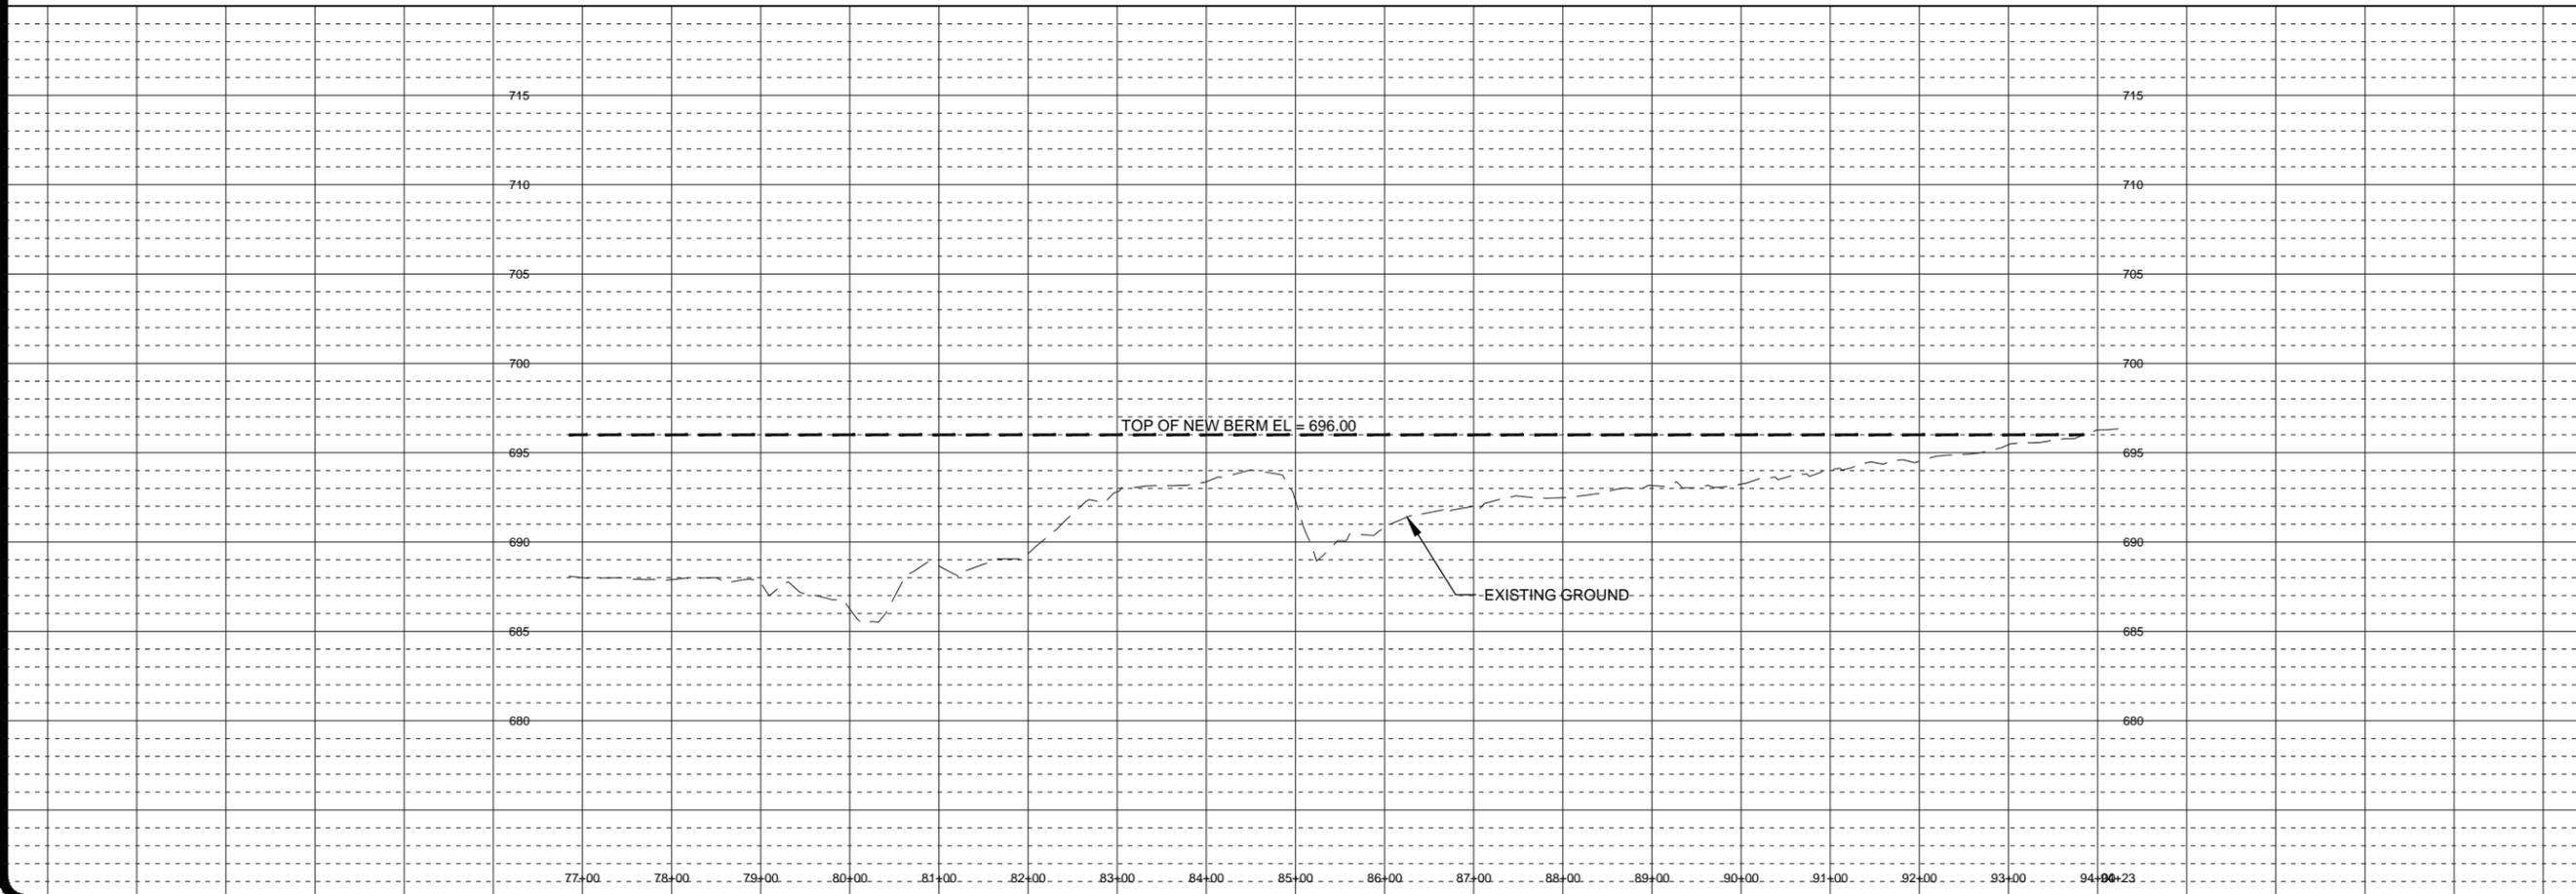

**HAWKEYE WILDLIFE
MANAGEMENT AREA WATER
QUALITY & WETLAND PROJECT**

JOHNSON COUNTY, IOWA

IDN 1412024

AUG. 2012

ISSUED

REVISIONS

.

.

.

.

ENGINEER

BWJ

DRAWN BY

RJS

CHECKED BY

BWJ

FIELD BOOK NO.





FIELDBOOK

DRAWING NO.


PP-04

SHEET NO.


09 / 12

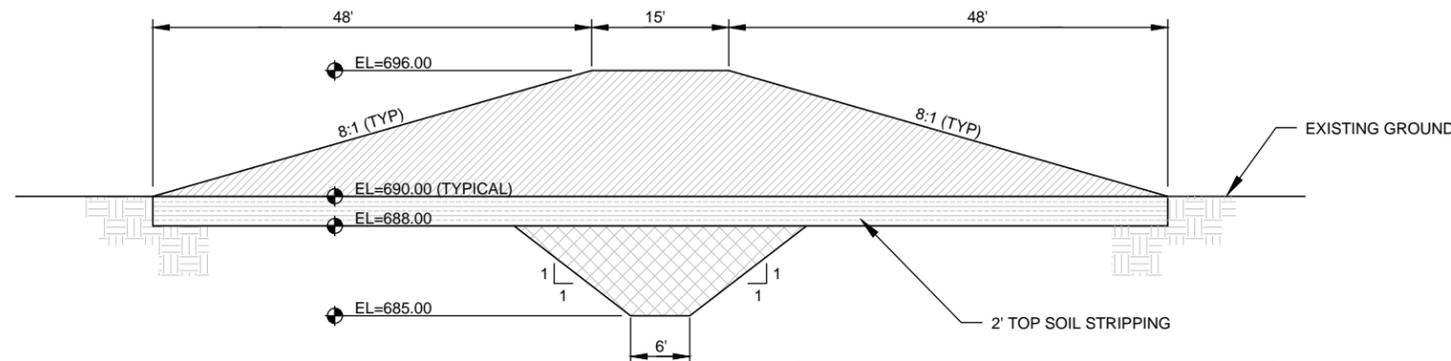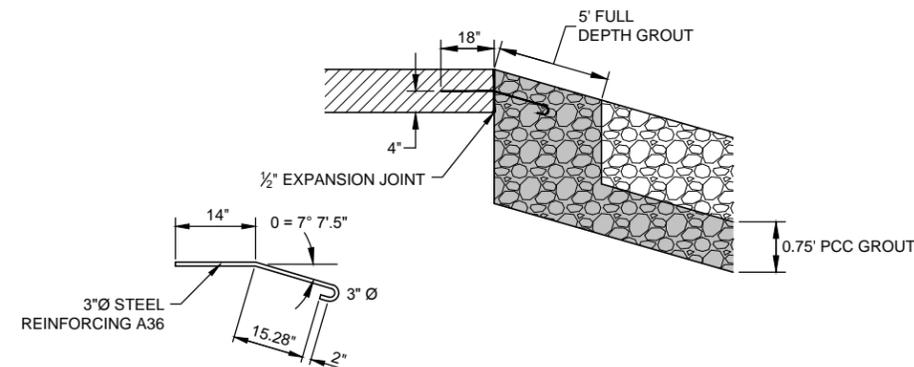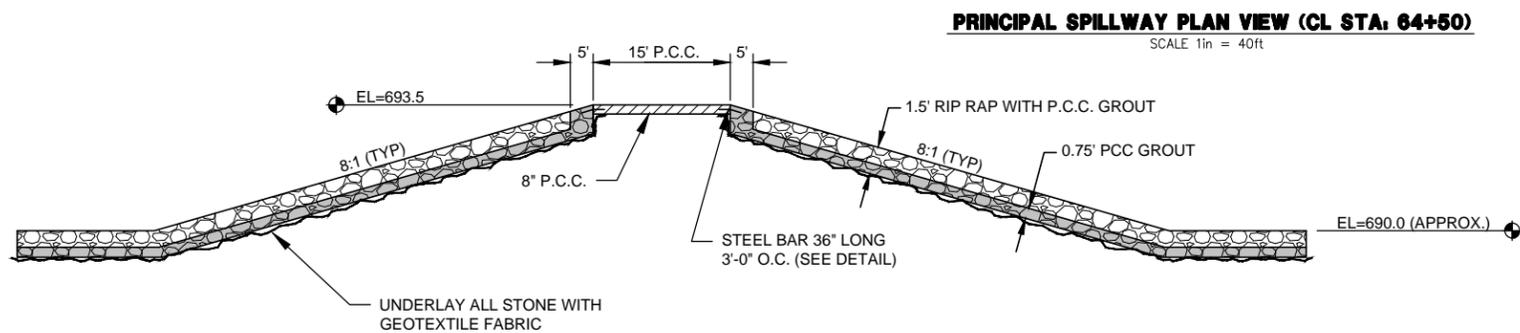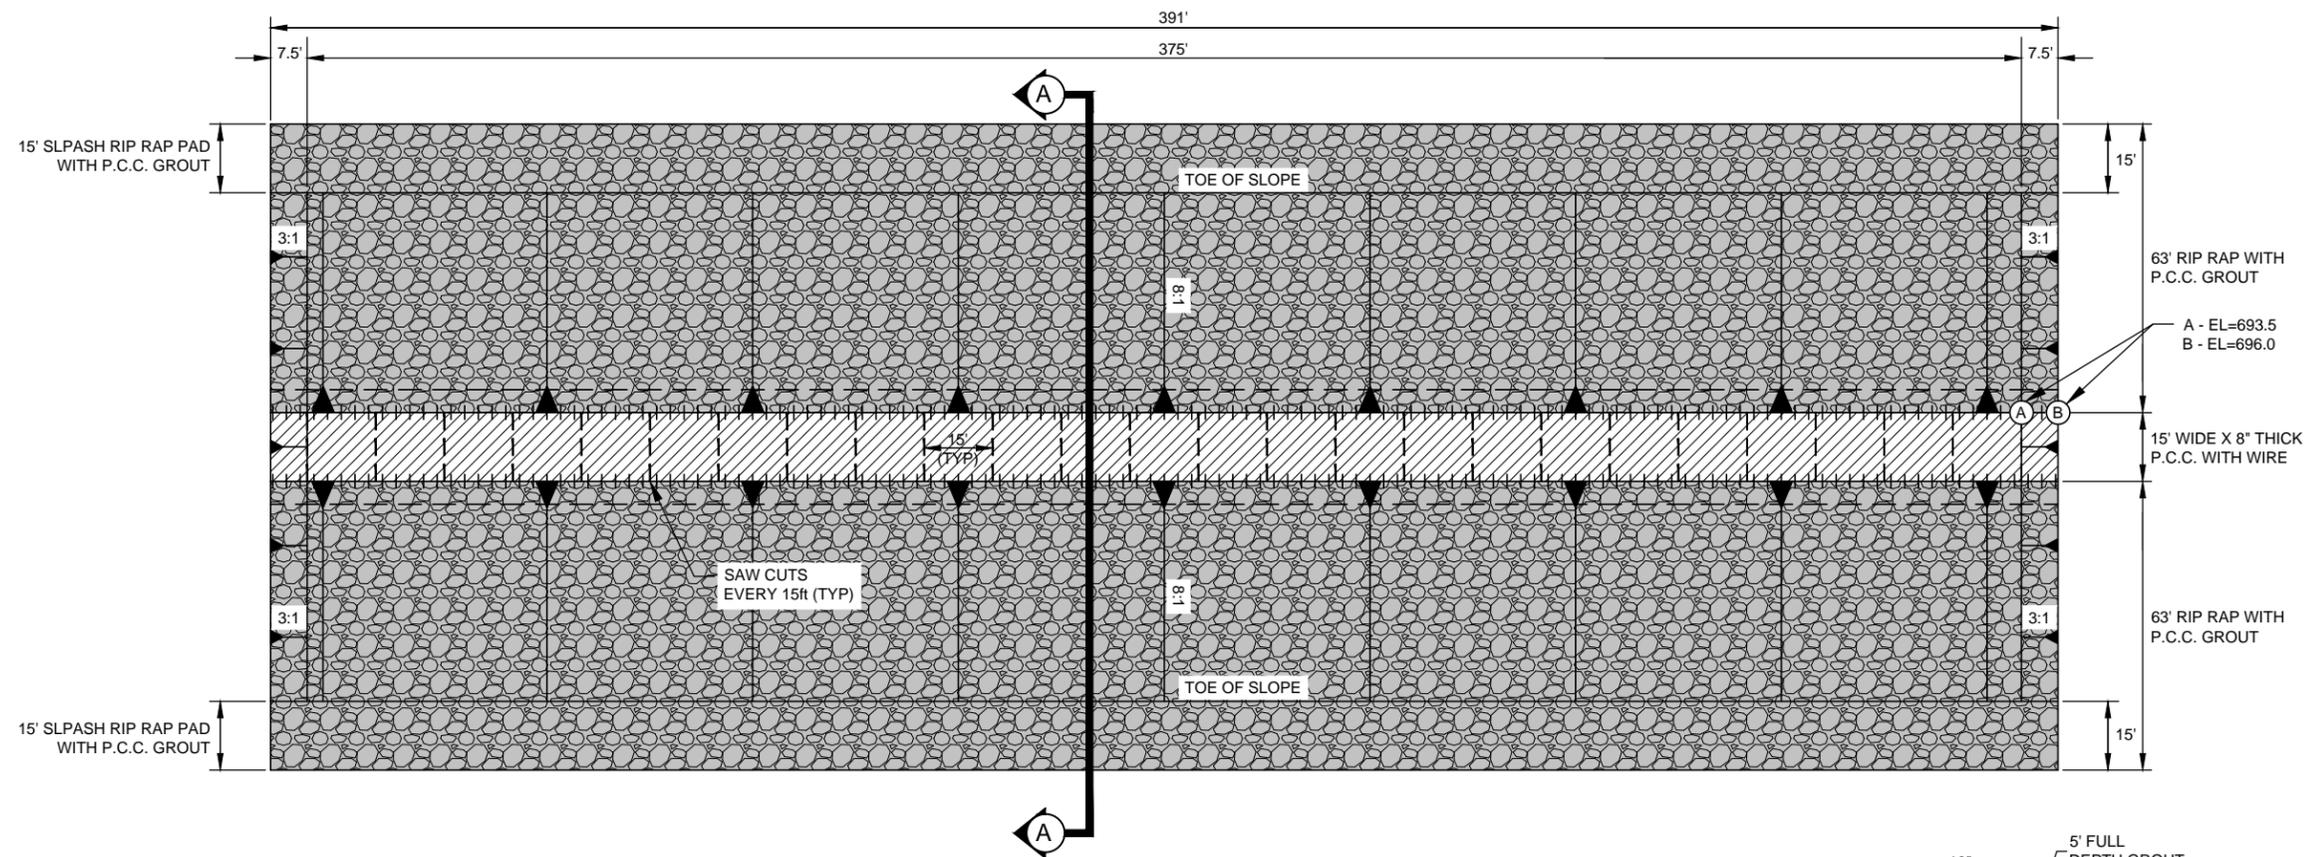


NOTE:
COMPACTED FILL WITH MOISTURE CONTROL IN 8 in. LIFTS.

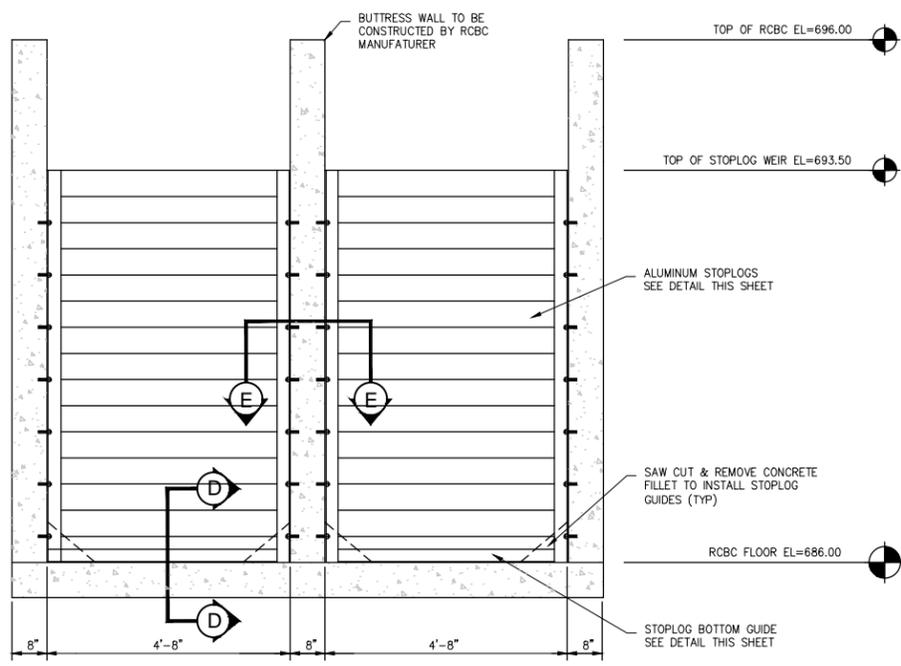


WCS SECTION B
NOT TO SCALE

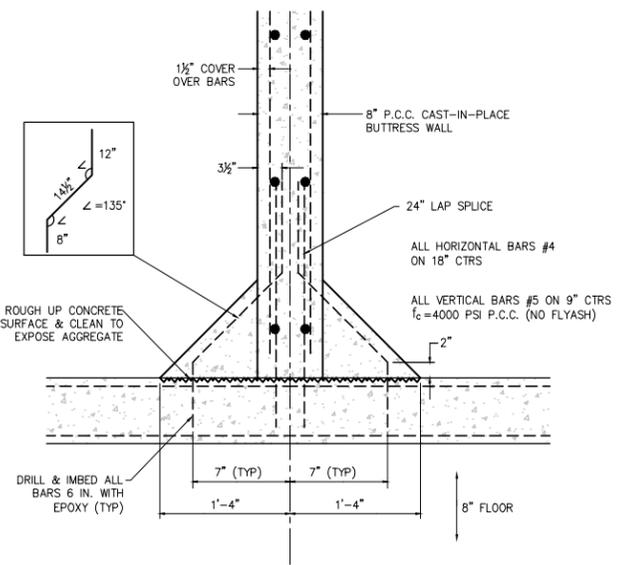


CONCRETE FILLET DETAIL
NOT TO SCALE

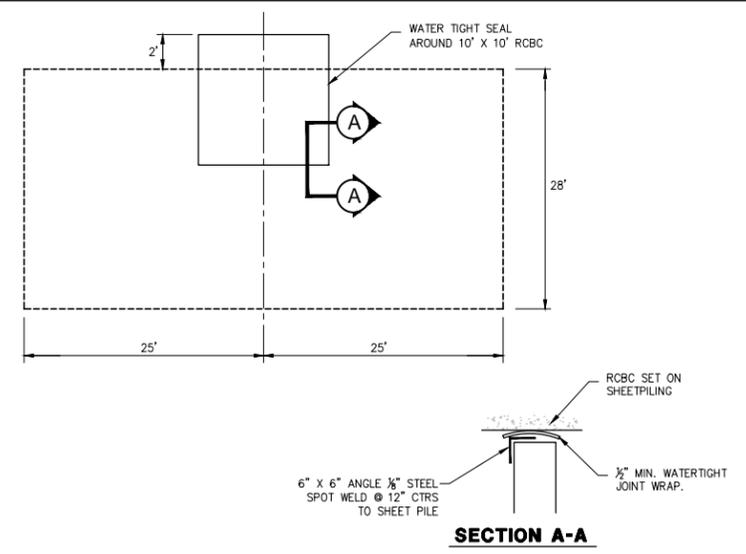


SHEET PILING DETAIL
NOT TO SCALE

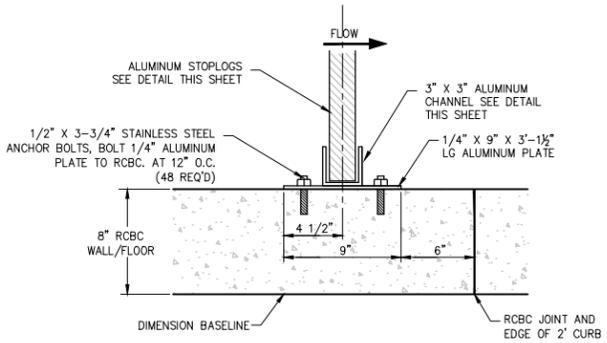


STOPLOG GUIDE DETAIL D
NOT TO SCALE

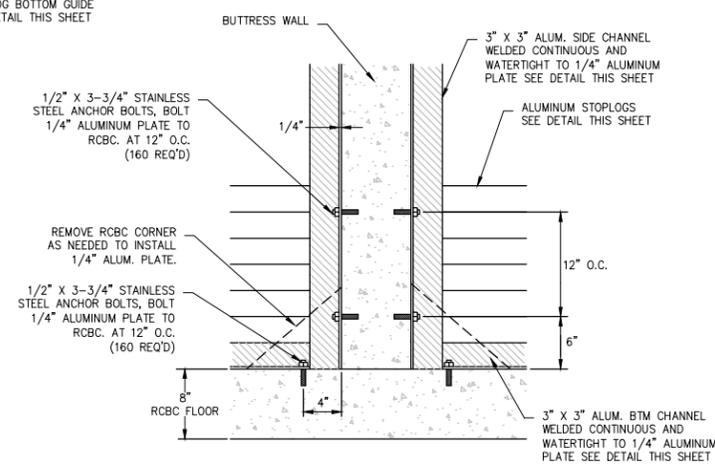


STOPLOG CHANNEL PLATE DETAIL E
NOT TO SCALE

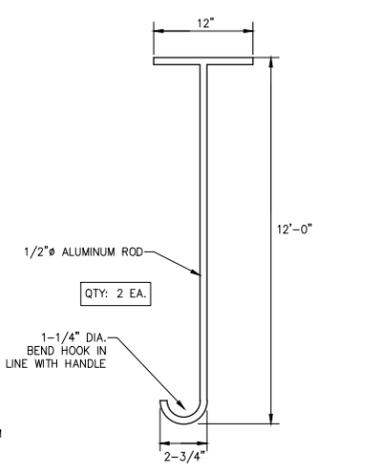


STOPLOG LIFTING HOOK DETAIL
NOT TO SCALE

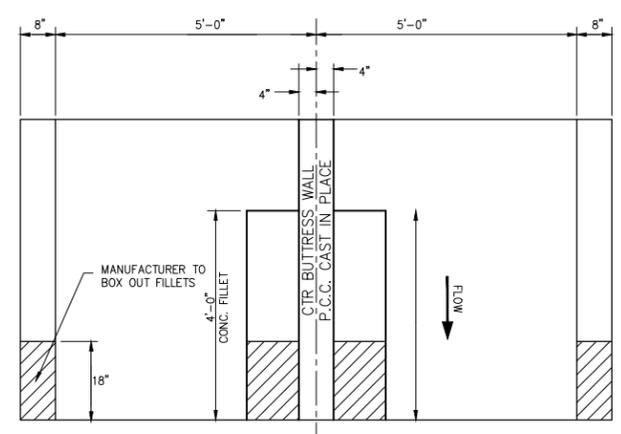


PLAN VIEW

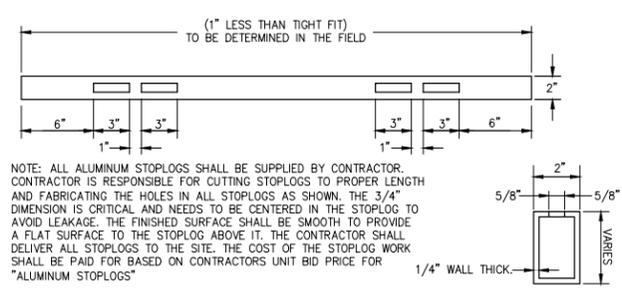


ALUMINUM STOPLOG DETAIL
NOT TO SCALE

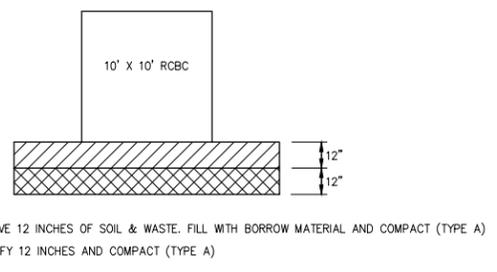


SUBGRADE PREPARATION FOR 10' X 10' RCBC
NOT TO SCALE




STOPLOG CHANNEL DETAIL
NOT TO SCALE

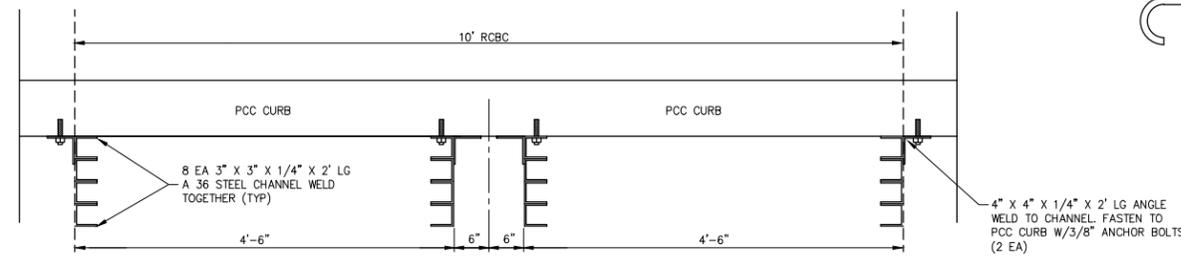

STOPLOG STORAGE DETAIL
NOT TO SCALE

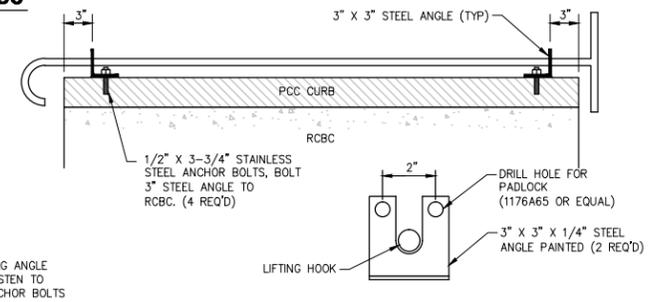

STOPLOG LIFTING HOOK STORAGE DETAIL
NOT TO SCALE

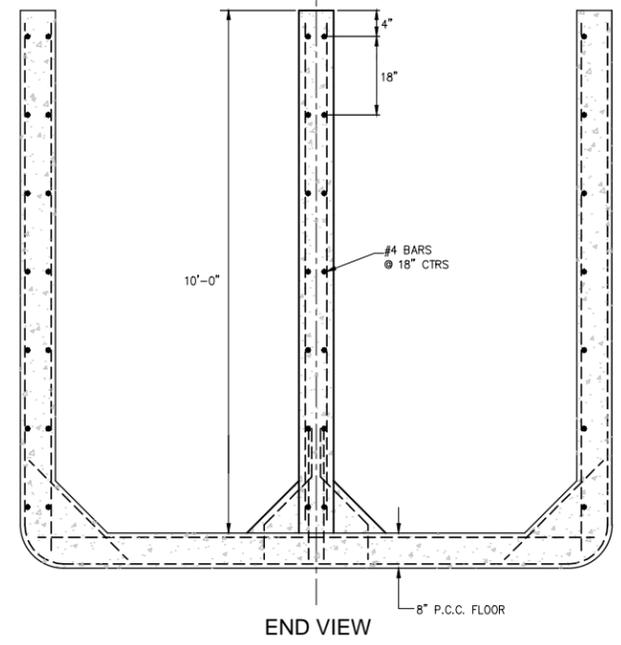

END VIEW
CAST-IN-PLACE P.C.C. BUTTRESS WALL
NOT TO SCALE